



Coilmaster Electronics Co., Ltd.
9F-3 No.398, Huan Bei Rd. Chung Li City, Taoyuan 320, Taiwan

Email: sales@bec.co.uk
Web: www.bec.co.uk



SDS0603EB SERIES ~ High Current Power Inductors



PART NUMBERING SYSTEM


SEP	0603EB	—	2R2M	—	LF
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

FEATURES :

- Low profile (3.0mm max. height) and 7.5 mm max. square.
- Magnetically shielded and low DC resistance.
- Suitable for large current.
- Ideal for DC – DC converter inductor application in hand held personal Computer, etc.
- Frequency range up to 5MHZ.
- Large current handling capability.


SHAPES AND DIMENSIONS:

UNIT : mm

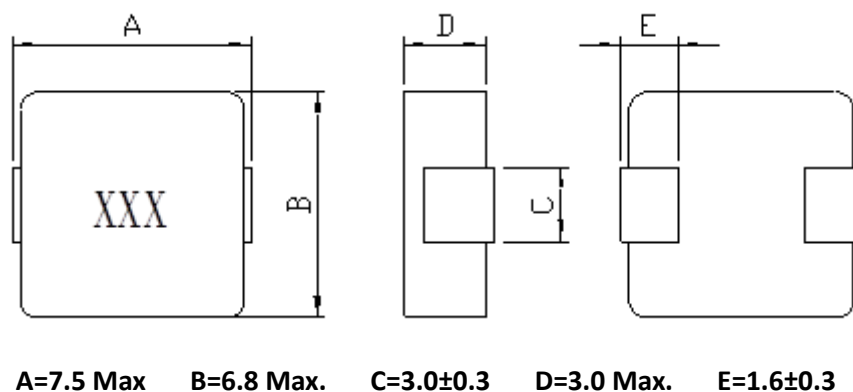

RECOMMENDED PATTERNS:

UNIT : mm

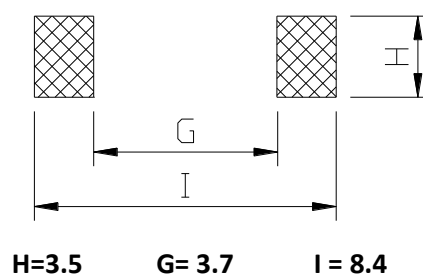



Coilmaster Electronics Co., Ltd.
9F-3 No.398, Huan Bei Rd. Chung Li City, Taoyuan 320, Taiwan

Email: sales@bec.co.uk

Web: www.bec.co.uk




SDS0603EB SERIES ~ High Current Power Inductors



SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (μ H)	Isat (A) (Min.)	Irms (A) (Min.)	DCR (m Ω) (Max.)	DCR (m Ω) (Typ.)	TEST FREQ. (f)
SEP0603EB-R10M-LF	0.10 $\pm$ 20%	60.0	32.5	1.7	1.5	100KHz/0.1V
SEP0603EB-R15M-LF	0.15 $\pm$ 20%	45.0	30.0	2.5	1.9	100KHz/0.1V
SEP0603EB-R20M-LF	0.20 $\pm$ 20%	41.0	24.0	3.0	2.4	100KHz/0.1V
SEP0603EB-R22M-LF	0.22 $\pm$ 20%	40.0	23.0	2.8	2.5	100KHz/0.1V
SEP0603EB-R33M-LF	0.33 $\pm$ 20%	30.0	20.0	3.9	3.5	100KHz/0.1V
SEP0603EB-R36M-LF	0.36 $\pm$ 20%	26.0	20.0	3.9	2.6	100KHz/0.1V
SEP0603EB-R47M-LF	0.47 $\pm$ 20%	26.0	17.5	4.2	4.0	100KHz/0.1V
SEP0603EB-R56M-LF	0.56 $\pm$ 20%	25.5	16.5	5.0	4.7	100KHz/0.1V
SEP0603EB-R68M-LF	0.68 $\pm$ 20%	25.0	15.5	5.5	5.0	100KHz/0.1V
SEP0603EB-R82M-LF	0.82 $\pm$ 20%	24.0	13.0	8.0	6.7	100KHz/0.1V
SEP0603EB-1R0M-LF	1.0 $\pm$ 20%	22.0	11.0	10.0	9.0	100KHz/0.1V
SEP0603EB-1R5M-LF	1.5 $\pm$ 20%	18.0	9.0	15.0	14.0	100KHz/0.1V
SEP0603EB-2R2M-LF	2.2 $\pm$ 20%	14.0	8.0	20.0	18.0	100KHz/0.1V
SEP0603EB-2R5M-LF	2.5 $\pm$ 20%	14.0	7.0	22.0	20.0	100KHz/0.1V
SEP0603EB-3R3M-LF	3.3 $\pm$ 20%	13.5	6.0	30.0	28.0	100KHz/0.1V
SEP0603EB-4R7M-LF	4.7 $\pm$ 20%	10.0	5.5	40.0	37.0	100KHz/0.1V
SEP0603EB-5R6M-LF	5.6 $\pm$ 20%	6.0	5.5	42.0	39.0	100KHz/0.1V
SEP0603EB-6R8M-LF	6.8 $\pm$ 20%	8.0	4.5	60.0	54.0	100KHz/0.1V
SEP0603EB-7R5M-LF	7.5 $\pm$ 20%	7.8	4.2	60.0	54.0	100KHz/0.1V
SEP0603EB-8R2M-LF	8.2 $\pm$ 20%	7.5	4.0	68.0	64.0	100KHz/0.1V
SEP0603EB-100M-LF	10 $\pm$ 20%	7.0	3.0	105.0	102.0	100KHz/0.1V

- All test Data is referenced to 25°C ambient.
- Typical Heat Rating DC Current would cause an approximately ΔT of 40°C.
- Typical Saturation DC Current would cause L_o to drop approximately 30%
- Operating Temperature Range: -55°C ~ +125°C.



Coilmaster Electronics Co., Ltd.
9F-3 No.398, Huan Bei Rd. Chung Li City, Taoyuan 320, Taiwan


Email: sales@bec.co.uk
Web: www.bec.co.uk



SDS0603EB SERIES ~ High Current Power Inductors



PACKAGING SPECIFICATION

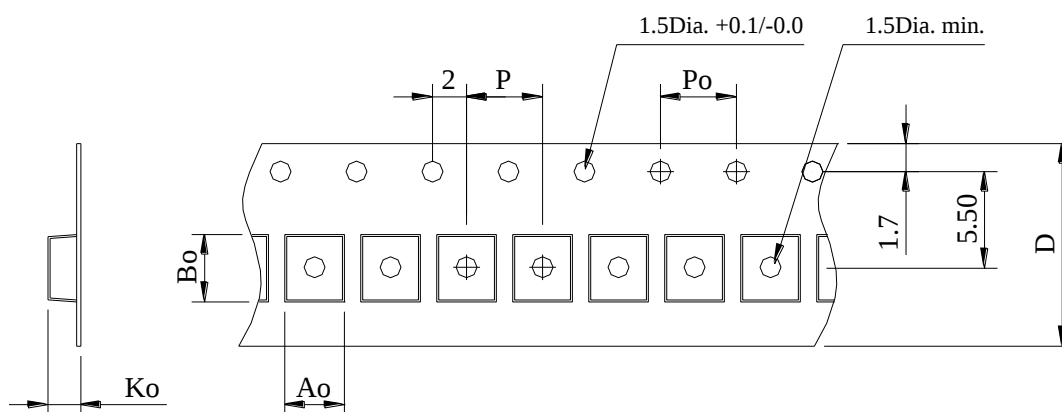

STAYLE	Q'TY (PCS)	DIMENSIONS (m/m)					
		Ao	Bo	Ko	P	Po	D±0.5
13"	1,000	7.2	7.5	3.6	12	4.0	16