



Coilmaster Electronics Co., Ltd.
9F-3 No.398, Huan Bei Rd. Chung Li City, Taoyuan 320, Taiwan

Email: sales@bec.co.uk
Web: www.bec.co.uk



SEP0402EB SERIES~ High Current SMD Power Inductors



PART NUMBERING SYSTEM


SEP	0402EB	—	R10M	—	LF
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

FEATURES :

- Low profile (2.0mm max. height) and 4.6 mm max. square.
- Magnetically shielded and low DC resistance and Suitable for large current .
- Ultra low buzz noise, due to composite construction .
- Frequency range up to 5MHZ .
- Large current handling capability .

SHAPES AND DIMENSIONS :


UNIT : mm

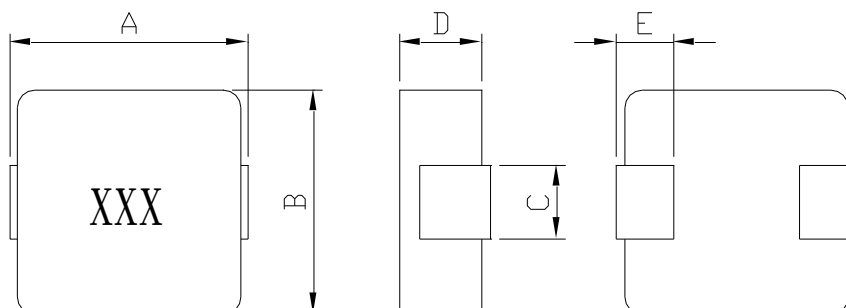

A=5.0 Max. B=4.4 Max. C=0.8±0.3 D=2.1 Max. E=1.5±0.3

RECOMMENDED PATTERNS

UNIT : mm

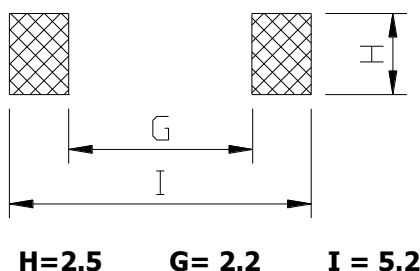

H=2.5 G= 2.2 I = 5.2

SEP0402EB SERIES~ High Current SMD Power Inductors




SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (μ H)	Isat (A) (Typ.)	Irms (A) (Typ.)	DCR (m Ω) (Typ.)	DCR (m Ω) (Max.)	TEST FREQ. (f)
SEP0402EB-R10M-LF	0.10 $\pm$ 20%	35.0	11.0	4.5	5.0	100KHz/0.25V
SEP0402EB-R22M-LF	0.22 $\pm$ 20%	24.0	13.0	7.3	8.0	100KHz/0.25V
SEP0402EB-R47M-LF	0.47 $\pm$ 20%	11.5	5.60	16.0	18.0	100KHz/0.25V
SEP0402EB-1R0M-LF	1.0 $\pm$ 20%	8.50	3.75	33.0	37.0	100KHz/0.25V
SEP0402EB-2R2M-LF	2.2 $\pm$ 20%	6.00	2.85	80.0	90.0	100KHz/0.25V

- Isat : DC current at which the inductance drops 20% (typ) from its value without current.
- Irms : Average current for a 40°C temperature rise above 25°C ambient.
- Operating temperature range -55°C to +125°C , Electrical specifications at 25°C .

PACKAGING SPECIFICATION

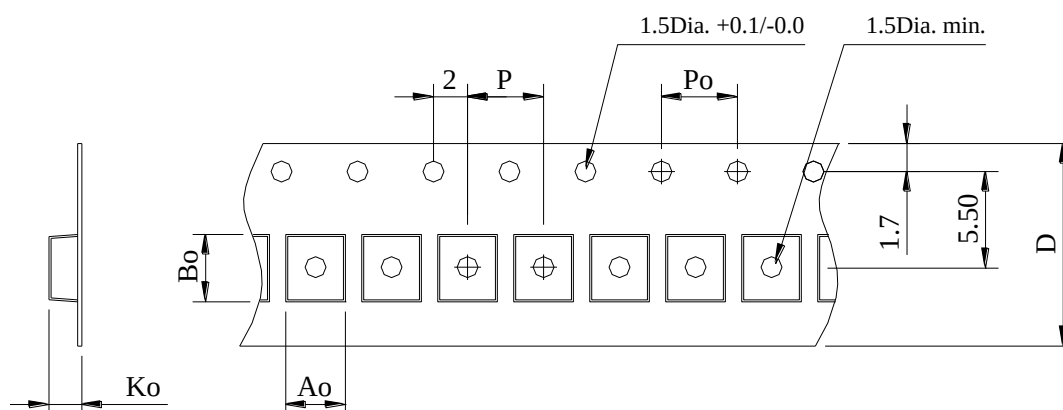

STAYLE	Q' TY (PCS)	DIMENSIONS (m/m)					
		Ao	Bo	Ko	P	Po	D $\pm$ 0.3
13"	2,000	4.5 $\pm$ 0.1	5.5 $\pm$ 0.1	2.3 $\pm$ 0.1	12	4.0	12