



Coilmaster Electronics Co., Ltd.

info@coilmaster.com.tw

TEL : +886-3-422-8279 FAX : +886-3-422-8734

www.coilmaster.com.tw

9F-3 No.398, Huan Bei Road, Chung Li City , Taoyuan 320, Taiwan .

10/100 Base - TX1x4Port Transformer Modules



RoHS Compliant

PART NUMBERING SYSTEM





S72 — **5028** — **LF**
TYPE DIMENSIONS LEAD FREE

FEATURES

- With various turns ratios
- Meets all IEEE standards including 350uH OCL with 8mA bias
- For RoHS parts add suffix LF
- RoHS compliant peak solder rating 235°C

SHAPES AND DIMENSIONS

Mechanicals

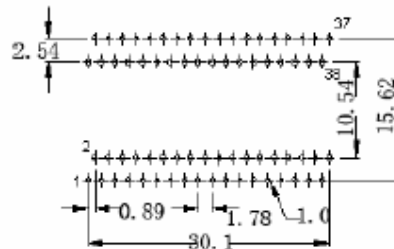

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm$



Coilmaster Electronics Co., Ltd.

TEL : +886-3-422-8279 FAX : +886-3-422-8734

9F-3 No.398, Huan Bei Road, Chung Li City , Taoyuan 320, Taiwan .

10/100 Base - TX1x4Port Transformer Modules




RoHS Compliant

FEATURES

- Designed to support 1:1 turns ratio transceivers
- Meets IEEE 802.3 specification
- Designed for long haul Gigabit Ethernet (10/100/1000Base-T) applications
- S24-5008-LF designed to fit behind 1x1 RJ45 connector
- Cable interface for isolation and low common mode emissions
- RoHS compliant peak solder rating 235°C

Schematics : S72-5028-LF

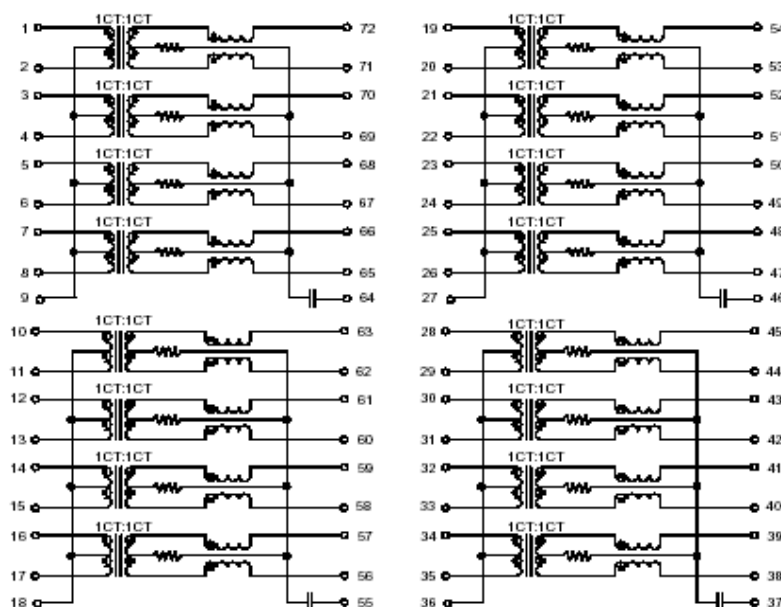

ELECTRICAL CHARACTERISTICS @ 25°C --- Operating Temperature 0°C to 70°C

PART NUMBER	Insertion Loss (dB Max)	Turns Ratio (±5%)	DCR Max. (Ω)	Pri inductance (1KHz/0.1V @8mA) Min.	Pri inductance (1MHz/0.1V) Max.	Return loss (dB Min) MHz			Crosstalk (dB Min) MHz			Hipot (Vrms/0.5mA)
	0.1-100MHz					1-30	40-50	60-80	30	60	100	
S72-5028-LF	-1.0	1CT:1CT	0.9	350uH	0.5uH	-18	-14.2	-12.0	-40	-37.5	-33	1500