



SEP4030EX SERIES ~ High Current Power Inductors



PART NUMBERING SYSTEM


SEP	4030EX	—	3R3M	—	LF
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

FEATURES :

- High current and very low DCR
- Inductance range: 3.3 μ H – 6.8 μ H
- Magnetically shielded and low DC resistance and Suitable for large current .
- Excellent temperature stability for inductance and saturation with AEC-Q200 Grade 1 (–40°C to +125°C) .

SHAPES AND DIMENSIONS :


UNIT : mm

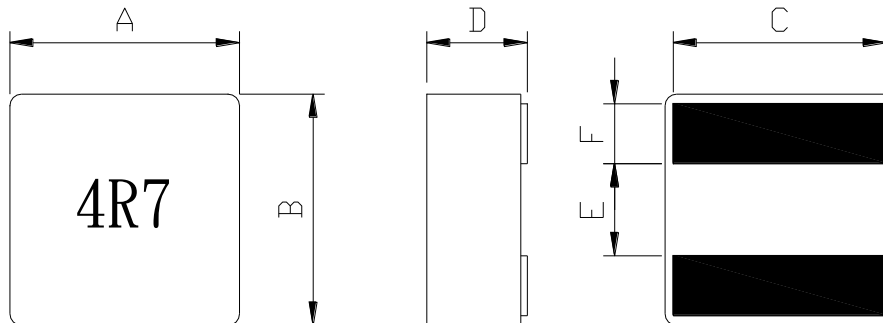

A=4.1±0.25 B=4.1±0.25 C=3.4±0.3 D=2.8±0.2 E=0.88±0.2 F= 1.6±0.25

RECOMMENDED PATTERNS

UNIT : mm

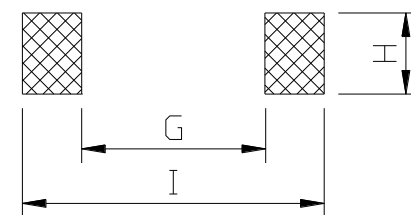

H=3.7 G= 1.39 I = 3.35



Coilmaster Electronics Co., Ltd.
3F No.211, Huan Bei Rd. Chung Li District , Taoyuan City, Taiwan

Email: sales@bec.co.uk
Web: www.bec.co.uk



SEP4030EX SERIES ~ High Current Power Inductors



SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (μ H)	I _{sat} (A) (Max.)	I _{rms} (A) (Max.)	DCR (m Ω) (Typ.)	DCR (m Ω) (Max.)
SEP4030EX-3R3M-LF	3.3 \pm 20%	5.30	6.60	26.0	28.6
SEP4030EX-4R7M-LF	4.7 \pm 20%	4.80	5.10	40.1	44.1
SEP4030EX-6R8M-LF	6.8 \pm 20%	4.60	4.00	67.4	74.1

- I_{sat} : DC current at which the inductance drops 30% (Max.) from its value without current.
- I_{rms} : Average current for a 40°C temperature rise above 25°C ambient.
- Test Frequency at 100KHz / 0.1V
- Operating temperature range -40°C to +125°C , Electrical specifications at 25°C.