



SQH5012S SERIES ~ Low Profile SMD Power Inductors




PART NUMBERING SYSTEM

SQH	5012S	—	100M	—	LF
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

SHAPES AND DIMENSIONS


UNIT : mm

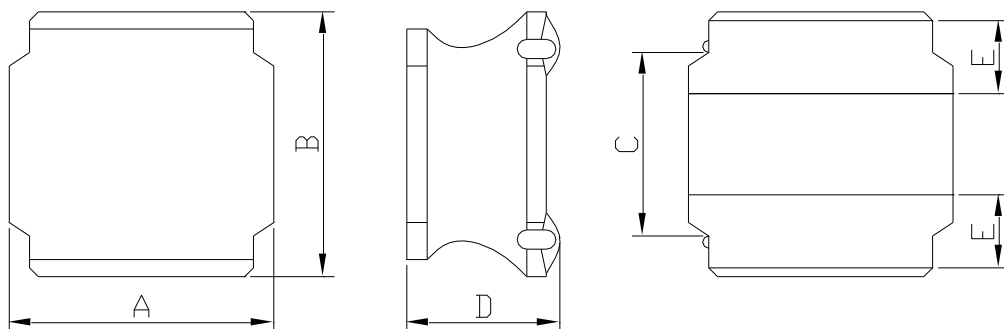

A=5.2 Max. B=5.2 Max. C=3.25 Ref. D=1.2 Max. E=1.2±0.2

RECOMMENDED PATTERNS

UNIT : mm

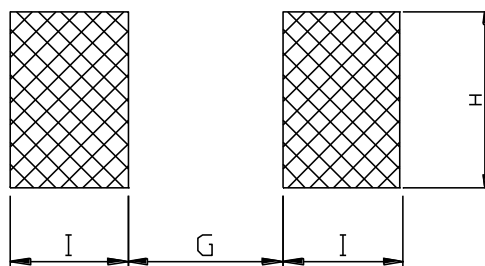

G= 2.10 H= 4.00 I = 1.50

FEATURES

- * Low profile and small inductors (5.2mm Max. square and 1.2mm Max. height)
- * Magnetically shielded construction and high current
- * Ideal for DC-DC converter choke coil for portable equipments (DVDs , DSC , Cellular , PDAs)
- * RoHS compliant option with lead free

SQH5012S SERIES ~ Low Profile SMD Power Inductors



SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (μ H)	DCR (m Ω) (Max.)	Isat (A) (Max.)	Irms (A) (Max.)	TEST FREQ. (f)
SQH5012S-1R0N-LF	1.0 $\pm$ 30%	64	4.5	2.3	100KHz
SQH5012S-1R5N-LF	1.5 $\pm$ 30%	84	3.8	2.2	100KHz
SQH5012S-2R2M-LF	2.2 $\pm$ 20%	102	3.1	2.0	100KHz
SQH5012S-3R3M-LF	3.3 $\pm$ 20%	192	2.4	1.45	100KHz
SQH5012S-4R7M-LF	4.7 $\pm$ 20%	216	2.2	1.40	100KHz
SQH5012S-6R8M-LF	6.8 $\pm$ 20%	312	1.7	1.10	100KHz
SQH5012S-100M-LF	10 $\pm$ 20%	504	1.4	0.85	100KHz

- Isat : DC current at which the inductance drops 30%(typ) from its value without current.
- Irms : The temperature rise current value is the DC current value having temperature increase up 40°C temperature rise from 25°C ambient.
- Operating temperature range -40°C to +105°C , Electrical specifications at 25°C .