



SDC3D14HP SERIES

Low Profile Shielded Power Inductors




RoHS Compliant

PART NUMBERING SYSTEM

<u>SDC</u>	<u>3D14HP</u>	—	<u>1R5N</u>	—	<u>LF</u>
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

SHAPES AND DIMENSIONS


UNIT : mm

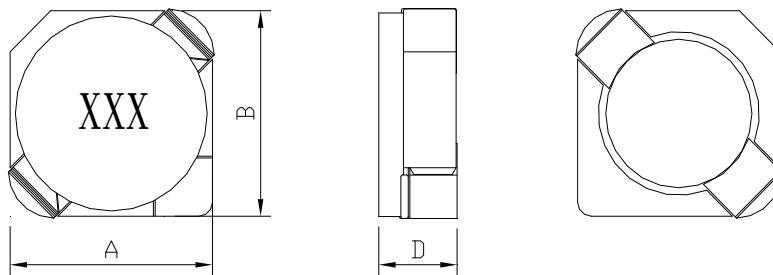

A=4.00 max. B=4.00 max. D=1.5 max.

RECOMMENDED PATTERNS

UNIT : mm

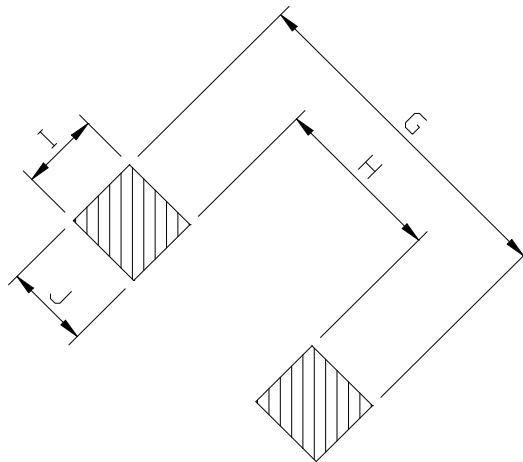

G= 5.2 H= 2.4 I = 1.5 J = 1.4



Coilmaster Electronics Co., Ltd.

9F-3 No.398, Huan Bei Rd. Chung Li City, Taoyuan 320, Taiwan
Tel : +886-3-422-8279 Fax : +886-3-422-8734

E-mail : info@coilmaster.com.tw

Web Site : www.coilmaster.com.tw

SDC3D14HP SERIES

Low Profile Shielded Power Inductors




RoHS Compliant

ELECTRICAL CHARACTERISTICS :

PART NUMBER	INDUCTANCE (μH)	DCR (m Ω) (max)	Isat (A) (Max.)	Irms (A) (Max.)	TEST FREQ. (f)
SDC3D14HP-1R5N-LF	1.5 \pm 30%	76	2.60	1.85	100KHz
SDC3D14HP-2R4N-LF	2.4 \pm 30%	129	2.00	1.32	100KHz
SDC3D14HP-3R2N-LF	3.2 \pm 30%	139	1.80	1.25	100KHz
SDC3D14HP-4R7N-LF	4.7 \pm 30%	214	1.45	1.04	100KHz
SDC3D14HP-6R8N-LF	6.8 \pm 30%	290	1.20	0.84	100KHz
SDC3D14HP-100N-LF	10 \pm 30%	440	1.00	0.67	100KHz
SDC3D14HP-150N-LF	15 \pm 30%	650	0.80	0.50	100KHz
SDC3D14HP-220N-LF	22 \pm 30%	830	0.65	0.48	100KHz

- Isat : DC current at which the inductance drops 35% (typ) from its value without current.
- Iirms: The actual current when temperature of coil becomes $\Delta 40^{\circ}\text{C}$. ($T_a = +25^{\circ}\text{C}$)
- Operating temperature range -40°C to $+125^{\circ}\text{C}$, Electrical specifications at 25°C .
- Packing : 13" reel, machine-ready ,embossed plastic tape (2,000 parts per full reel).

PACKAGING SPECIFICATION

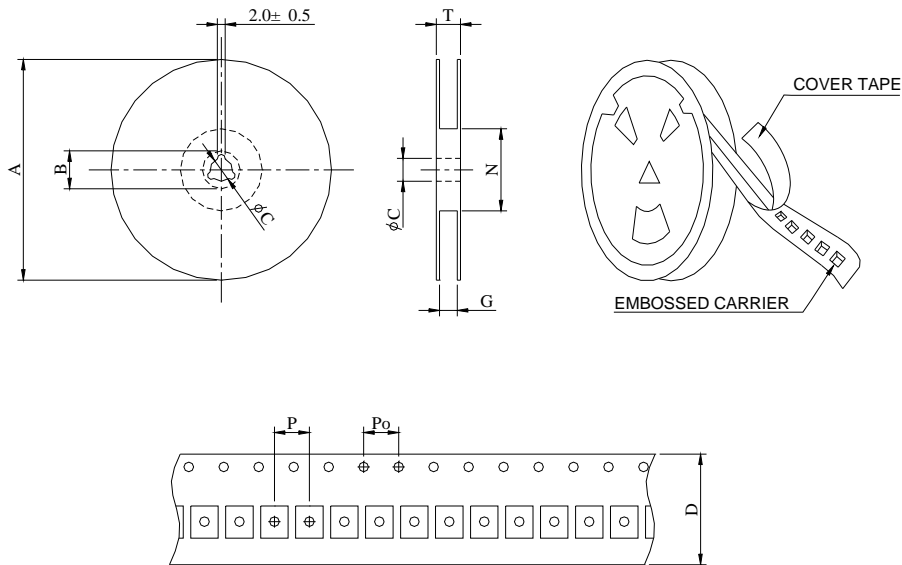

SERIES	STAYLE	Q' TY (PCS)	DIMENSIONS (m/m)								
			A	B ± 0.8	C ± 0.5	D	G ⁺⁰	N ⁻⁰	P	Po	T
SDC3D14HP	13-16	2000	330	21	13	16	18	50	8	4	22.4