



Coilmaster Electronics Co., Ltd.
9F-3 No.398, Huan Bei Rd. Chung Li City, Taoyuan 320, Taiwan
Tel : +886-3-422-8279 Fax : +886-3-422-8734

E-mail : info@coilmaster.com.tw
Web Site : www.coilmaster.com.tw

SDS3D18 SERIES

Low Profile Shielded Power Inductors




RoHS Compliant

PART NUMBERING SYSTEM

SDS	3D18	—	6R8N	—	LF
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

SHAPES AND DIMENSIONS


UNIT : mm

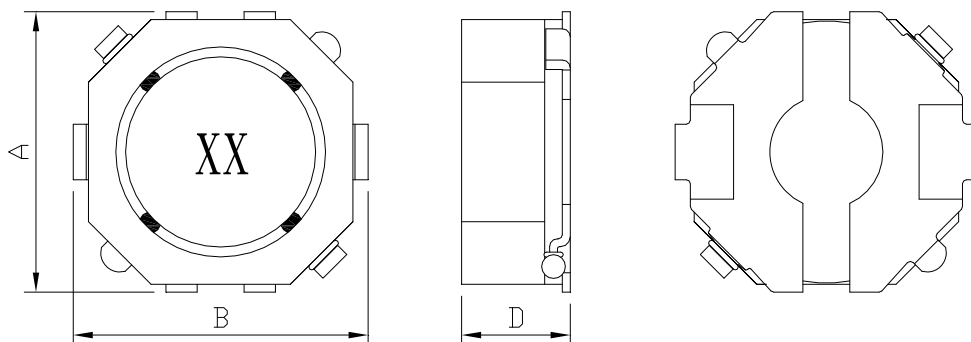

A=4.0 Max. B=4.0 Max. D=1.8 Max.

RECOMMENDED PATTERNS

UNIT : mm

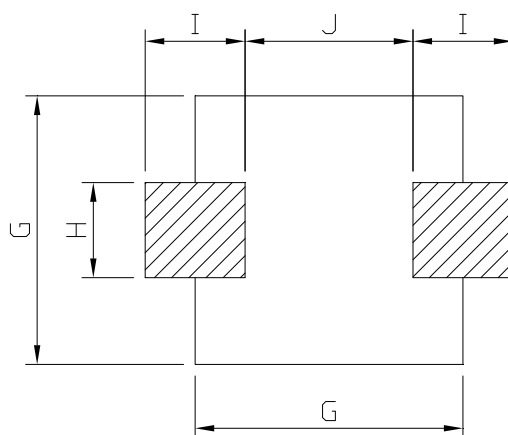

G=4.0 H=1.5 I=1.4 J=2.0



Coilmaster Electronics Co., Ltd.
 9F-3 No.398, Huan Bei Rd. Chung Li City, Taoyuan 320, Taiwan
 Tel : +886-3-422-8279 Fax : +886-3-422-8734

E-mail : info@coilmaster.com.tw
 Web Site : www.coilmaster.com.tw

SDS3D18 SERIES

Low Profile Shielded Power Inductors



RoHS Compliant

ELECTRICAL CHARACTERISTICS :

PART NUMBER	INDUCTANCE (μ H)	DCR (m Ω) Max.(Typ.)	Isat (A) (Max.)	Irms (A) (Max.)	Stamp
SDS3D18-1R2N-LF	1.2 $\pm$ 30%	88(70)	2.00	1.90	1R2
SDS3D18-1R8N-LF	1.8 $\pm$ 30%	100(80)	1.80	1.80	1R8
SDS3D18-2R2N-LF	2.2 $\pm$ 30%	113(90)	1.60	1.70	2R2
SDS3D18-2R7N-LF	2.7 $\pm$ 30%	125(100)	1.40	1.55	2R7
SDS3D18-3R3N-LF	3.3 $\pm$ 30%	138(110)	1.20	1.45	3R3
SDS3D18-3R9N-LF	3.9 $\pm$ 30%	150(120)	1.10	1.35	3R9
SDS3D18-4R7N-LF	4.7 $\pm$ 30%	162(130)	1.00	1.25	4R7
SDS3D18-5R6N-LF	5.6 $\pm$ 30%	181(145)	0.95	1.15	5R6
SDS3D18-6R8N-LF	6.8 $\pm$ 30%	200(160)	0.90	1.05	6R8
SDS3D18-8R2N-LF	8.2 $\pm$ 30%	225(180)	0.80	0.95	8R2
SDS3D18-100M-LF	10 $\pm$ 20%	250(200)	0.75	0.85	100
SDS3D18-120M-LF	12 $\pm$ 20%	337(270)	0.65	0.70	120
SDS3D18-150M-LF	15 $\pm$ 20%	393(315)	0.60	0.65	150
SDS3D18-180M-LF	18 $\pm$ 20%	437(350)	0.55	0.60	180
SDS3D18-220M-LF	22 $\pm$ 20%	563(450)	0.50	0.55	220
SDS3D18-270M-LF	27 $\pm$ 20%	637(510)	0.45	0.45	270
SDS3D18-330M-LF	33 $\pm$ 20%	712(570)	0.40	0.40	330
SDS3D18-390M-LF	39 $\pm$ 20%	956(765)	0.38	0.35	390
SDS3D18-470M-LF	47 $\pm$ 20%	1100(880)	0.32	0.30	470

- Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc using an Agilent/HP 4263B LCR meter or equivalent.
- Isat : DC current at which the inductance drops 30% (typ) from its value without current.
- Irms: The actual current when temperature of coil becomes $\Delta 40^{\circ}\text{C}$. (Ta=+25 $^{\circ}\text{C}$)
- Operating temperature range -40 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$, Electrical specifications at 25 $^{\circ}\text{C}$.
 Packing : 13" reel, machine-ready ,embossed plastic tape (3,000 parts per full reel).