



Coilmaster Electronics Co., Ltd.

9F-3 No.398, Huan Bei Rd. Chung Li City, Taoyuan 320, Taiwan
Tel : +886-3-422-8279 Fax : +886-3-422-8734

E-mail : info@coilmaster.com.tw
Web Site : www.coilmaster.com.tw

SSB4311 SERIES – Low Profile SMD Power Inductors




RoHS Compliant

PART NUMBERING SYSTEM

SSB	4311	—	100M	—	LF
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

SHAPES AND DIMENSIONS


UNIT : mm

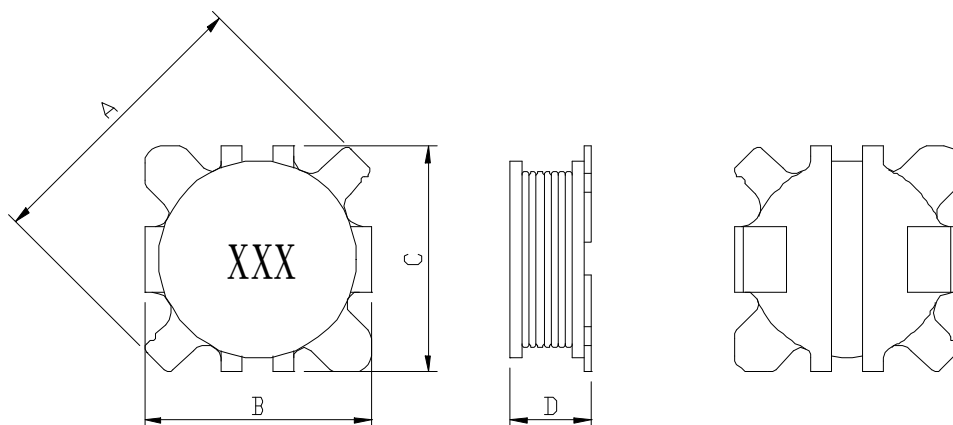

A=6.36 Max. B= 4.50±0.3 C=4.50±0.3 D=1.20 Max

RECOMMENDED PATTERNS

UNIT : mm

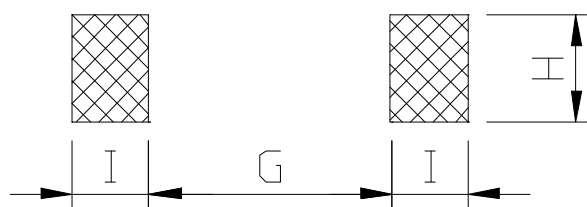

G=1.7 H=1.60 I=2.00

**Coilmaster Electronics Co., Ltd.**

9F-3 No.398, Huan Bei Rd. Chung Li City, Taoyuan 320, Taiwan
Tel : +886-3-422-8279 Fax : +886-3-422-8734

E-mail : info@coilmaster.com.tw
Web Site : www.coilmaster.com.tw

SSB4311 SERIES – Low Profile SMD Power Inductors

RoHS Compliant

SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (μ H)	DCR (m Ω) (Max.)	Isat (A)	Irms (A)	TEST FREQ. (f)
SSB4311-2R2N-LF	2.2 $\pm$ 30%	93	1.46	1.46	100KHz/0.1V
SSB4311-3R3N-LF	3.3 $\pm$ 30%	124	1.15	1.15	100KHz/0.1V
SSB4311-4R7N-LF	4.7 $\pm$ 30%	173	0.90	0.90	100KHz/0.1V
SSB4311-6R8N-LF	6.8 $\pm$ 30%	257	0.80	0.80	100KHz/0.1V
SSB4311-100M-LF	10.0 $\pm$ 20%	377	0.70	0.70	100KHz/0.1V
SSB4311-150M-LF	15.0 $\pm$ 20%	544	0.55	0.55	100KHz/0.1V
SSB4311-220M-LF	22.0 $\pm$ 20%	724	0.47	0.50	100KHz/0.1V
SSB4311-330M-LF	33.0 $\pm$ 20%	1083	0.41	0.42	100KHz/0.1V
SSB4311-470M-LF	47.0 $\pm$ 20%	1656	0.32	0.34	100KHz/0.1V

- Inductance measured using a Coilmaster SMD fixture in an Agilent/HP 4284A or equivalent.
- Isat: DC current at which the inductance drops 10% (typ) from its value without current.
- Irms: Average current for 30°C (max) rise from +25°C ambient.
- Storage and ambient operating temperature range -40°C to +125°C.
- Packing : 13" reel, machine-ready ,embossed plastic tape (3,500 parts per full reel).