


## TOKO #6DFSD-1090C-10 alternative > BEC-BP-6-5R-1090-S15

### Electrical Specifications

Item	Specifications
1	Center Frequency [fo] 1090.0 MHz
2	Bandwidth [BW] fo ±7.5[1082.5~1097.5] MHz
3	Insertion Loss in BW 3.30dB Max.
4	Ripple in BW 0.80dB Max.
5	VSWR in BW (Ratio) 1.80:1 Max.
6	In/Out Impedance 50Ω
7	Attenuation [Absolute Value] 62.0 dB Min. @ fo - 60 MHz
8	Operation Temperature Range -40°C to +85°C

### Dimensions

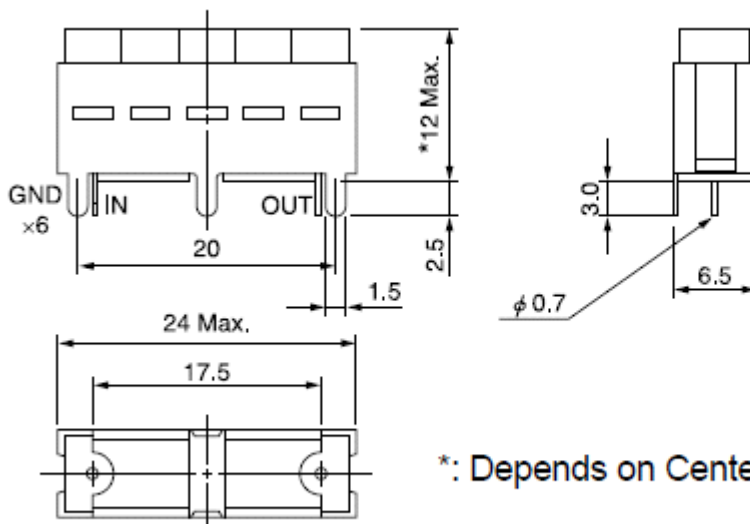

(Unit: mm)

\*: Depends on Center Frequency.