

TBP302KG alternative BCE508302KG

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 15A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Torque value : M3 , 4.43Lb.in
- 4.Wire range : 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 2.5mm²

NOTES2:







- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.0/5.08mm, Poles : N=02~24P
- 3.Stripping length : 7~8mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm														
To	Over	To	Over	To	Over	0.1/10										
6	10	6	10	30	60	100	150	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

- 6.RoHS Compliance

2EDGK - 5.0/5.08 - XXP - 1Y - 1000A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

02P: Clasp on the left from this view

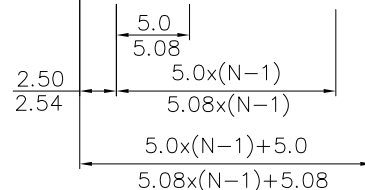

DETACHED LISTS	PART NO.: /	BEC DISTRIBUTION LIMITED		
	APPD: /	NAME: TBP302KG alternative BCE508302KG		
	CHKD: /			
	DRFT: /	TITLE: CUSTOMER DRAWING	REV	DO
 THIRD ANGLE PROJECTION		DRAWING NO.: /	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1