


## FEATURES

- Top of the range pure aluminum foil capacitor,
- Very Low Dielectric absorption factor
- Very Low Dissipation factor, Very Low ESR, Very Low Inductance
- A luxury capacitor designed especially for modern high-end tweeters and mid-range drivers

## DRAWING (mm)

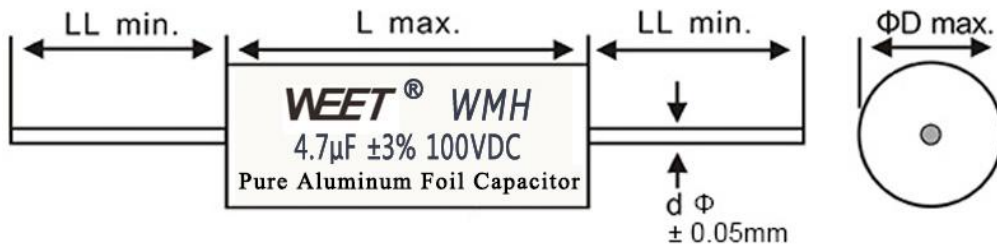

## PICTURE



## SPECIFICATIONS

Passive flammability	GB10191-88 IEC384-16
Operating temperature	-55°C ~ +85°C
Capacitance range	1~10uF
Capacitance tolerance	±3%、±5% 1KHz
Rated voltage	100V、200V.DC
Withstand voltage	1.6VR 5S
Dissipation factor	≤0.0005 1KHz
Insulate the electric resistance	CR≤0.33μF, I.R≥15,000MΩ
	CR>0.33μF, I.R≥5,000S
Leads Diameter	1.0 Tinned Pure Copper Wire

## SIZE TABLE (mm)

μF	100V				
	Dissipation	OD	L	d	LL
1.0uF	≤0.0005	17	52	1.0	45
1.5uF	≤0.0005	19	52	1.0	45
1.8uF	≤0.0005	18	60	1.0	45
2.0uF	≤0.0005	17	60	1.0	45
2.2uF	≤0.0005	19	60	1.0	45
2.7uF	≤0.0005	20	60	1.0	45
3.0uF	≤0.0005	19	77	1.0	45
3.3uF	≤0.0005	20	77	1.0	45
4.0uF	≤0.0005	22	77	1.0	45
4.7uF	≤0.0005	23	77	1.0	45
5.0uF	≤0.0005	23	77	1.0	45
5.6uF	≤0.0005	24	77	1.0	45
6.0uF	≤0.0005	24	87	1.0	45
6.8uF	≤0.0005	25	87	1.0	45
7.0uF	≤0.0005	25.5	87	1.0	45
8.0uF	≤0.0005	26	87	1.0	45
8.2uF	≤0.0005	27	87	1.0	45
9.0uF	≤0.0005	29	87	1.0	45
10.0uF	≤0.0005	30	87	1.0	45
μF	200V				
	Dissipation	OD	L	d	LL
1.0uF	≤0.0005	24.5	37	1.0	45
2.2uF	≤0.0005	23	66	1.0	45
3.3uF	≤0.0005	28	66	1.0	45
4.7uF	≤0.0005	28	87	1.0	45
5.6uF	≤0.0005	30	87	1.0	45
6.8uF	≤0.0005	32.8	87	1.0	45

**Note: Other Values are available on request. WEET is capable of doing custom service for you.**



**WEE Technology Company Limited**  
ROOM 1405, 14/F, LUCKY CENTRE,  
171 WANCHAI ROAD,  
WANCHAI, HONG KONG  
[www.musicaps.com](http://www.musicaps.com)  
[sales@musicaps.com](mailto:sales@musicaps.com)

All details in this data sheet are subject to change without notice.  
For more details and updates, please visit our website.

Copyright © 2000 WEE Technology, All rights reserved.

