


REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.07.08


WEIDMULLER 1716360000 alternative
 TERMINAL BLOCK PLUGGABLE, 6 POSITION, 26-14AWG

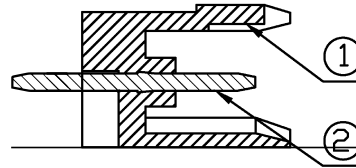



SECTION A-A

Electrical :

- | | | |
|---|---------------|------|
| | UL | IEC |
| 1.Rated Voltage : | 300V | 320V |
| 2.Rated Current : | 15A | 20A |
| 3.Withstanding Voltage : | AC1600V/1Min; | |
| 4.Operating Temperature : | -40°C~+105°C; | |
| 5. RoHS Compliance; | | |
| 6.Safety Approval : | cULus CE | |
| 7." * " is the key quality control point. | | |

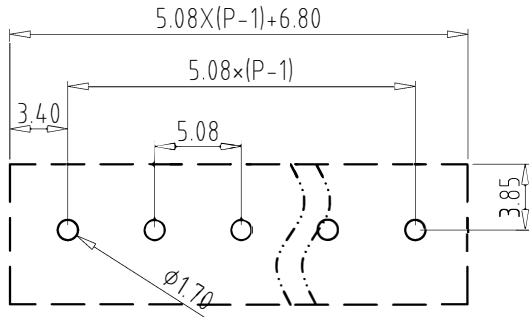

PCB LAYOUT

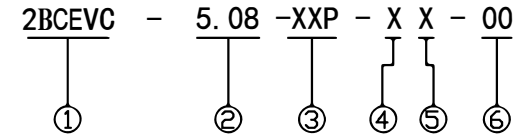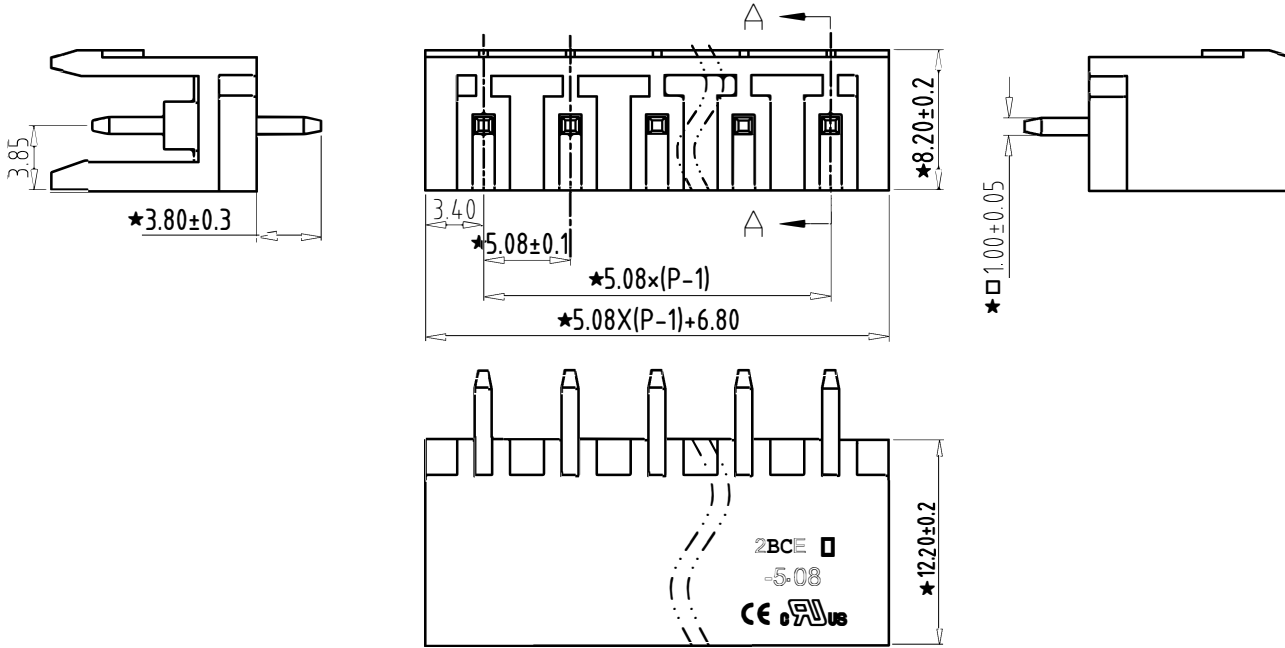

- ① Series NO. ④ 1 Single Pitch
 2 Double Pitch
- ② Pitch ⑤ Color: 1 Grey
 2 Blue
 3 Black
 4 Green
 5 Orange
 6 Red
 7 Transparent
 8 Yellow
 9 White
- ③ Poles
 02 02Contacts
 03 03Contacts
 ... 24 24Contacts
- ⑥ Customer Request: 00-- Standard

2	PIN	XX	P	BRASS	Tin Plated
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.07.08	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE		SCALE	1:1	
APP.	DATE		NAME	2BCEVC-5.08-XXP-XX-00	
			DWGNO.	XXXX	



BEC Distribution Ltd

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	=	-	//							
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 10	over 10	all	over 100	over 150	0.2	0.3	0.3	0.2	0.3	0.5
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90													