
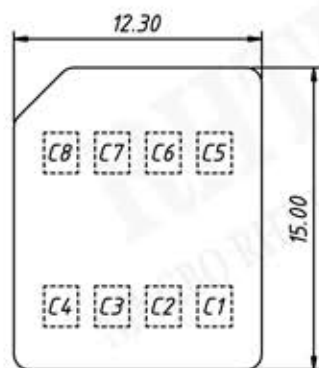
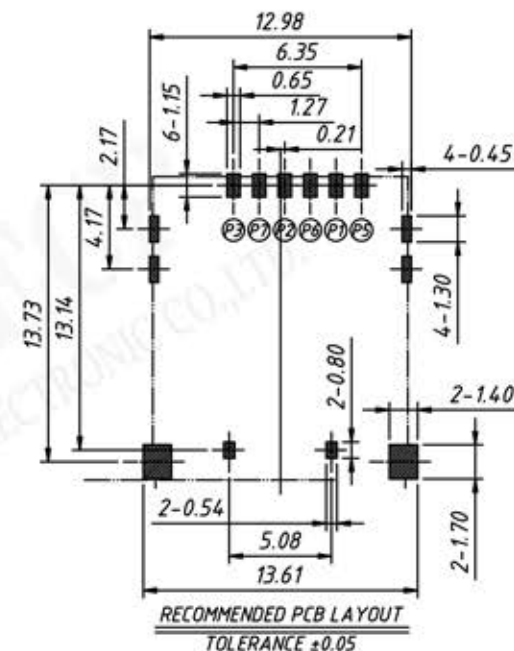
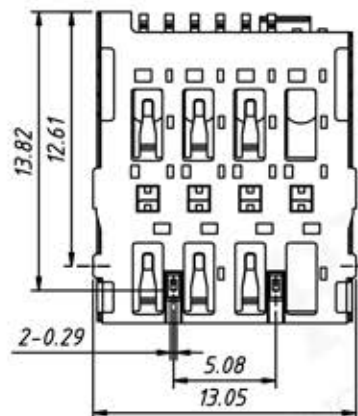
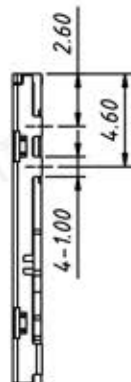


P/N: RE-C-SIM-046

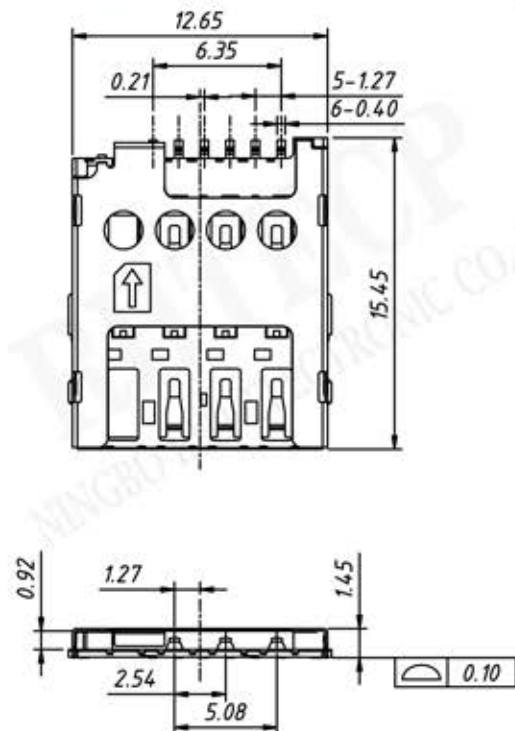

MICRO-SIM CARD DIM.(REF)

PIN ASSIGNMENT:

PIN1:VCC
PIN2:RST
PIN3:CLK
PIN4:RESERVED
PIN5:GND
PIN6:VPP
PIN7:I/O
PIN8:RESERVED

Material:

Insulator:Hi-Temperature Plastic,UL 94V-0.Black.

Terminal:Copper Alloy,50u" min Nickel underplated on allover,gole plated allover.

Shell:Stainless Steel,50u" Nickel underplated on allover,gole flash on solder latch.

Electrical:

Current Rating:0.5 A

Voltage Rating:5.0 V

Insulation Resistance:500M Ω Min./500V DC

Withstanding Voltage:250V AC For 1 minute.

Contact Resistance:100m Ω Max.

Operating Temp Range:-55°C TO +85°C

Mating Cycles:5000 Insertions.

