


**Electrical:**  
 Current Rating: 1 Amp/Pin.MAX.  
 Voltage: 30V DC.MAX  
 Low Level Contact Resistance: 30mΩ Max.Initially.  
 Dielectric Withstanding Voltage: 500V AC MIN.For 1 minute.  
 Insulation Resistance: 100MΩ Min.500V DC .For 1 minute.  
 Durability: 1000 Cycles.  
 Operating Force (Inserting & Withdrawal): 1N-10N.  
 Operating Temp Range: -25°C TO +85°C (Including Terminal Temp.Rise)  
 Storage Temp: -40°C TO +85°C

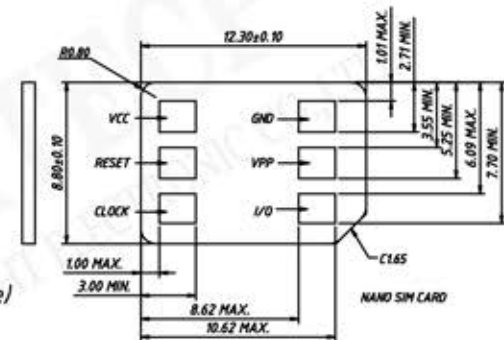

UNITS:mm	SHEET SIZE:A4		SCALE: ---
> 0~ 3	> 3~ 18	> 18~ 50	> 50~ 120
± 0.12	± 0.15	± 0.3	± 0.5