

PCB LAYOUT

Material

Screw: M4.0, steel, Zn plated

Cage: Brass, Nickel plated

Pin header: Brass, Tin plated

Housing: PA66, UL94V-0, Green



Electrical

Rated voltage: 300V

Rated current: 60A

Wire range: 20~6AWG 10mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC100.

Withstand voltage: AC2500V / 1 min

Mechanical

Temp. Range: -40 °C ~ +105 °C


Soldering: 250 °C 5Sec. Max.

Torque: 1.2 Nm (10.5 Lb.) in

Strip length: 9~10 mm

Order Information

RE - C - 116 - 10.16 - XXP - 4 S XX

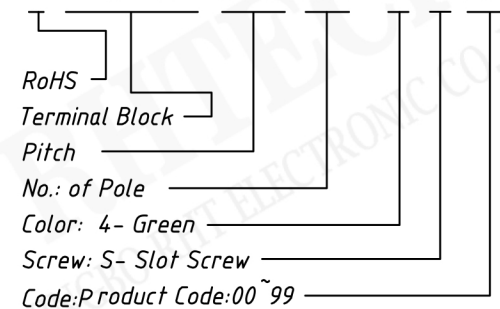

NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm

SHEET SIZE:A4

SCALE: ---

> 0~3

> 3~18

> 18~50


> 50~120

± 0.12

± 0.15

± 0.3

± 0.5



TERMINAL BLOCK