

PCB LAYOUT



Material

Screw: M3.0, steel, Zn plated
 Cage: Phosphor Bronze, Nickel plated
 Pin header: Brass, Tin plated
 Housing: PA66, UL 94V-0, Blue

Electrical


Rated voltage: 250V
 Rated current: 16A
 Wire range: 22~14AWG 1.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min

Mechanical

Temp. Range: -30 °C ~ +105 °C
 Soldering: 250 °C 5Sec. Max.
 Torque: 0.5 N.m (4.43 Lb. in)
 Strip length: 4.5~5 mm


Order Information

RE - C - 300 - 5.00 - XXP - 2 S XX

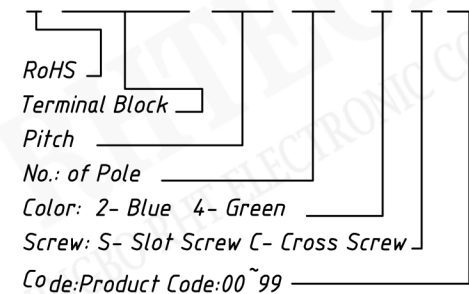

NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0~ 3	> 3~ 18	> 18~ 50	> 50~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		



TERMINAL BLOCK