

PCB LAYOUT

**Material**

Pin header: Brass, Tin plated

Housing: PBT, UL94V-0

**Electrical**

Rated voltage: 300V

Rated current: 10A

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V


Withstand voltage: AC2000V / 1 min

**Mechanical**

Temp. Range: -30 °C ~ +105 °C


Soldering: 250 °C 5Sec. Max.

**Order Information**

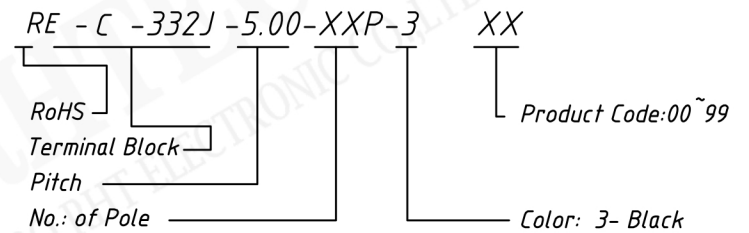

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0~ 3	> 3~ 18	> 18~ 50	> 50~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		



TERMINAL BLOCK