



SECTION A-A

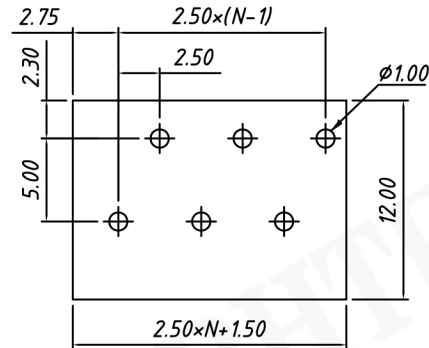

B type PCB LAYOUT

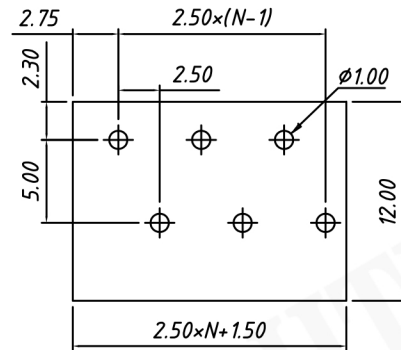

A type PCB LAYOUT



Material

Pin header: Phosphor bronze, Tin plated

Housing: PA66, UL94V-0

Electrical

Rated voltage: 300V

Rated current: 4A

Wire range: 28~20AWG 0.5mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1min

Mechanical

Temp. Range: -40 °C ~ +105 °C

Soldering: 250 °C±5 °C for 5S

Strip length: 9~10 mm

Order Information

RE - C -2.50V-5.00-XXP-1 A

RoHS

Terminal Block

Pitch

No. of Pole

Product Code: A~B

Color: 1-Gray

5-Orange