



TOKO 5CCD (614BN , 614AN) alternatives

- Replacement alternatives for TOKO 5CCD (614BN, 614AN) series

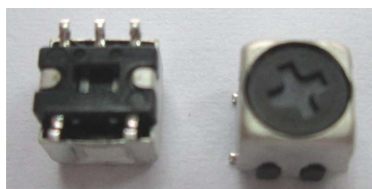

- Torque: 45-300g/CM
- Operate Humidity: 25% 85%
- Storage Humidity: 45% 75%RH
- ISO:9001 certificated

Unit: mm

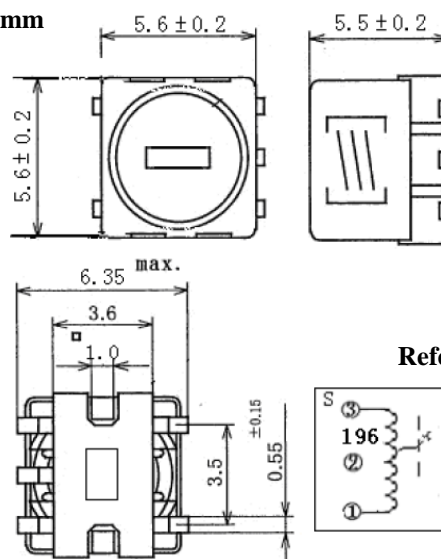

Relpacement	TOKO	Inductance L (uH)	Q	Test Freq (MHz)
9018Z-5CCD	614BN-9018Z	1.8	45	7.96
9020IB-5CCD	614BN-9020IB	2	45	7.96
9022Z-5CCD	614BN-9022Z	2.2	45	7.96
9024IB-5CCD	614BN-9024IB	2.4	50	7.96
9027IB-5CCD	614BN-9027IB	2.7	50	7.96
9030Z-5CCD	614BN-9030Z	3	50	7.96
9033Z-5CCD	614BN-9033Z	3.3	55	7.96
9036IB-5CCD	614BN-9036IB	3.6	55	7.96
9039Z-5CCD	614BN-9039Z	3.9	55	7.96
9043Z-5CCD	614BN-9043Z	4.3	55	7.96
9047Z-5CCD	614BN-9047Z	4.7	55	7.96
9051IB-5CCD	614BN-9051IB	5.1	55	7.96
9056Z-5CCD	614BN-9056Z	5.6	65	7.96
9062Z-5CCD	614BN-9062Z	6.2	65	7.96
9068Z-5CCD	614BN-9068Z	6.8	65	7.96
9075Z-5CCD	614BN-9075Z	7.5	65	7.96
9082Z-5CCD	614BN-9082Z	8.2	65	7.96
9091Z-5CCD	614BN-9091Z	9.1	65	7.96
9100Z-5CCD	614BN-9100Z	10	45	2.52
9110Z-5CCD	614BN-9110Z	11	45	2.52
9120Z-5CCD	614BN-9120Z	12	45	2.52

SMD Variable Coils – 5CCD (614) series

Replacement	TOKO	Inductance L (uH)	Q	Test Freq (MHz)
9130Z-5CCD	614BN-9130Z	13	45	2.52
9150Z-5CCD	614BN-9150Z	15	45	2.52
9160Z-5CCD	614BN-9160Z	16	45	2.52
9180Z-5CCD	614BN-9180Z	18	45	2.52
9200Z-5CCD	614BN-9200Z	20	45	2.52
9220Z-5CCD	614BN-9220Z	22	45	2.52
9240Z-5CCD	614BN-9240Z	24	45	2.52
9270Z-5CCD	614BN-9270Z	27	45	2.52
9300Z-5CCD	614BN-9300Z	30	45	2.52
9330Z-5CCD	614BN-9330Z	33	45	2.52
9360Z-5CCD	614BN-9360Z	36	45	2.52
9390Z-5CCD	614BN-9390Z	39	45	2.52
9430Z-5CCD	614BN-9430Z	43	45	2.52
9470Z-5CCD	614BN-9470Z	47	45	2.52
9510Z-5CCD	614BN-9510Z	51	45	2.52
9560Z-5CCD	614BN-9560Z	56	45	2.52
9620Z-5CCD	614BN-9620Z	62	45	2.52
9680Z-5CCD	614AN-9680Z	68	30	2.52
9750Z-5CCD	614AN-9750Z	75	30	2.52
9820Z-5CCD	614AN-9820Z	82	30	2.52
9910Z-5CCD	614AN-9910Z	91	30	2.52
9101Z-5CCD	614AN-9101Z	100	45	0.796
9111Z-5CCD	614AN-9111Z	110	45	0.796
9121Z-5CCD	614AN-9121Z	120	45	0.796
9131Z-5CCD	614AN-9131Z	130	45	0.796
9151Z-5CCD	614AN-9151Z	150	45	0.796
9161Z-5CCD	614AN-9161Z	160	45	0.796
9181Z-5CCD	614AN-9181Z	180	45	0.796
9201Z-5CCD	614AN-9201Z	200	45	0.796
9221Z-5CCD	614AN-9221Z	220	45	0.796
9241Z-5CCD	614AN-9241Z	240	45	0.796
9271Z-5CCD	614AN-9271Z	270	45	0.796
9301Z-5CCD	614AN-9301Z	300	45	0.796
9331Z-5CCD	614AN-9331Z	330	45	0.796

SMD Variable Coils – 5CCD (614) series

Replacement	TOKO	Inductance L (uH)	Q	Test Freq (MHz)
9361Z-5CCD	614AN-9361Z	360	45	0.796
9391Z-5CCD	614AN-9391Z	390	45	0.796
9431Z-5CCD	614AN-9431Z	430	45	0.796
9471Z-5CCD	614AN-9471Z	470	45	0.796
9511Z-5CCD	614AN-9511Z	510	45	0.796
9561Z-5CCD	614AN-9561Z	560	45	0.796
9621Z-5CCD	614AN-9621Z	620	45	0.796
9681Z-5CCD	614AN-9681Z	680	45	0.796
9751Z-5CCD	614AN-9751Z	750	45	0.796
9821Z-5CCD	614AN-9821Z	820	45	0.796
9911Z-5CCD	614AN-9911Z	910	45	0.796
9102Z-5CCD	614AN-9102Z	1000	30	0.252
9112Z-5CCD	614AN-9112Z	1100	30	0.252
9122Z-5CCD	614AN-9122Z	1200	30	0.252
9132Z-5CCD	614AN-9132Z	1300	30	0.252

Please take our replacement samples to do approval test such as match circuit before mass production.

General temperature condition cannot endure at -40 to +85 deg C.

If high temperature range is required, please advise firstly, we can adopt special materials for.