

Data Sheet

Customer:

Product: Multilayer Ceramic Chip Capacitor

Sizes.: 01005/0201/0402/0603/0805/1206/1210/1808/1812/1825/2220
/2225

Issued Date: 11-Apr-25

Edition: REV.C



VIKING TECH CORPORATION
光頤科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頤科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw


VIKING ELECTRONICS (WUXI) CO., LTD.
光頤電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
11-Apr-25	11-Apr-25	11-Apr-25		
Mandy Chang	Ben Chang	Ben Chang		

Multilayer Ceramic Chip Capacitor

Multilayer Ceramic Chip Capacitor

Construction



①	Ceramic Dielectric	④	Nickel Layer:
②	Inner Electrodes	⑤	Tin Layer
③	Substrate Electrodes		

Features for ≤50V

- There is high reliability on monolithic structure of laminated layers
- And its character of excellent soldering ability and soldering resistance ability is suitable for reflow soldering and peak soldering.
- It includes high and stable capacitance
- High Frequency Type: This kind of dielectric material is considered as Class I capacitor. COG capacitors have the most stable electrical performance, which almost does not change with the change of temperature, voltage or time, they are suitable for the low-loss and high stability requirement circuits.
- X7R、X5R、X6S、X6T: X7R、X5R、X6S、X6T material is a kind of material has high dielectric constant.
The capacitor made of this kind material is considered as Class II capacitor whose capacitance is higher than that of class I. These capacitors are classified as having a semi-stable temperature characteristic and used over a wide temperature range, such in these kinds of circuits, DC-blocking, decoupling, bypassing, frequency discriminating etc.
- Executive Standard: GB/T 21041-2007 GB/T 21042-2007

Applications ≤50V

- It is suitable for all kinds of filter, coupled, harmonic vibration, bypassing and high frequency circuits.

Features for ≥100V

- High voltage MLCC is a kind of special design MLCC that bases on the technology of general MLCC. This kind of MLCC has stable high voltage reliability and suitable to SMT. High voltage MLCC is widely applicable for many direct high voltage circuits in which it can improve the performance of the circuit.
- There is high reliability on monolithic structure of laminated layers.
- And its character of excellent soldering ability and soldering resistance ability is suitable for reflow soldering and peak soldering.
- It includes high and stable capacitance
- Executive Standard: GB/T 21041-2007 GB/T 21042-2007


Applications ≥100V

- Analog & Digital Modems
- LAN/WAN Interface
- Lighting Ballast Circuits
- Voltage Multipliers
- DC-DC Converters
- Back-lighting Inverters

Part Numbering

MCF	03	J	T	N	250	3R9
Product Type	Dimensions (L×W)	Capacitance Tolerance	Packaging	Dielectric	Voltage (VDCW)	Capacitance
	E5: 01005 01: 0201 02: 0402 03: 0603 05: 0805 06: 1206 10: 1210 08: 1808 12: 1812 18: 1825 20: 2220 25: 2225	A: ±0.05pF (Cap≤10pF) B: ±0.1pF (Cap≤10pF) C: ±0.25pF (Cap≤10pF) D: ±0.5pF (Cap≤10pF) F: ±1% G: ±2% J: ±5% K: ±10% M: ±20% Z: +80/-20%	T: Taping Reel W: 13" Taping Reel	N: NPO (COG) B: X7R X: X5R S: X6S T: X6T	4V0: 4V 6V3: 6.3V 250: 25V 500: 50V 101: 100V 102: 1000V 202: 2000V 302: 3000V 402: 4000V 502: 5000V	3R9: 3.9pF 150: 15pF 181: 180pF 225: 2.2μF 106: 10μF

■ Dimensions

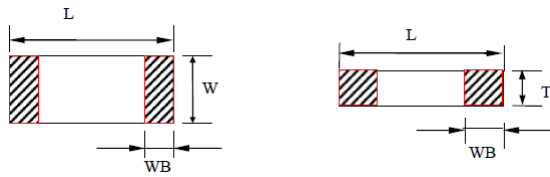

Unit: mm

Type	Size (Inch)	L	W	T/Symbol		WB
E5	01005	0.40±0.02	0.20±0.02	0.20±0.02	V	0.10±0.03
01	0201	0.60±0.03	0.30±0.03	0.30±0.03	C	0.15±0.05
		0.60±0.09	0.30±0.09	0.30±0.09	D	
		0.6±0.09	0.3±0.09	0.50±0.05	E	0.15±0.10
02	0402	1.00±0.05	0.50±0.05	0.50±0.05	E	0.25±0.05
		1.00±0.15	0.50±0.15	0.50±0.15	F	
		1.00±0.20	0.50±0.20	0.50±0.20	N	
03	0603	1.60±0.10	0.80±0.10	0.80±0.10	H	0.35±0.20
		1.60±0.20	0.80±0.20	0.80±0.20	B	
05	0805	2.00±0.20	1.25±0.20	0.80±0.20	B	0.50±0.20
				1.25±0.20	J	
06	1206	3.20±0.30	1.60±0.30	0.80±0.20	B	0.60±0.30
				1.00±0.20	I	
				1.25±0.20	J	
				1.60±0.20	M	
				1.60±0.30	L	
10	1210	3.20±0.30	2.50±0.30	1.25±0.20	J	0.60±0.30
				1.40±0.20	K	
				1.60±0.30	L	
				1.80±0.30	P	
				2.00±0.20	R	
				2.00±0.30	S	
08	1808	4.50±0.40	2.00±0.20	2.50±0.30	O	0.60±0.30
				1.60±0.30	L	
				1.80±0.30	P	
12	1812	4.50±0.40	3.20±0.30	2.00±0.30	S	0.60±0.30
				1.25±0.20	J	
				1.60±0.20	M	
				1.60±0.30	L	
				2.00±0.20	R	
				2.00±0.30	S	
18	1825	4.50±0.40	6.3±0.50	2.50±0.30	O	0.60±0.30
				1.60±0.30	L	
				2.00±0.30	S	
20	2220	5.70±0.40	5.00±0.40	1.80±0.30	P	0.60±0.30
				1.60±0.30	L	
				2.00±0.30	S	
				2.50±0.30	O	
25	2225	5.70±0.40	6.30±0.50	1.60±0.30	L	0.60±0.30
				1.80±0.30	P	
				2.00±0.30	S	
				2.50±0.30	O	

■ Temperature Coefficient /Characteristics

Dielectric	Reference Temperature Point	Temperature Coefficient	Operation Temperature Range
NOP(COG)	25°C	0±30ppm/°C	-55~125°C
X7R	25°C	±15%	-55~125°C
X5R	25°C	±15%	-55~85°C
X6S	25°C	±22%	-55°C ~ 105°C
X6T	25°C	-33%~+22%	-55°C ~ 105°C

Note : Nominal temperature coefficient and allowed tolerance of class I are decided by the changing of the capacitance between 20°C and 85°C. Nominal temperature coefficient of class II are decided by the temperature of 20°C.

Multilayer Ceramic Chip Capacitor

Measurement method of dielectric withstanding Voltage for High Voltage MLCC

Rated Voltage Range	Measuring Method
100V≤Vr<500V	Force 200% Rated Voltage for 5 second. Max. Current should not exceed 50mA
500V≤Vr≤1000V	Force 150% Rated Voltage for 5 second. Max. Current should not exceed 50mA
1000V<Vr≤2000V	Force 120% Rated Voltage for 5 second. Max. Current should not exceed 50mA
2000V<Vr≤5000V	Force 120% Rated Voltage for 5 second. Max. Current should not exceed 10mA

General Capacitance & Voltage

Capacitance & Voltage (NPO 10V~50V)

Dielectric		NPO																	
EIA	Size	01005				0201		0402		0603		0805		1206		1210		1812	
Code	VDCW	10V	16V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V
0R1	0.1pF	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
0R2	0.2	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
R22	0.22											B	B	B	B				
0R3	0.3	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
R47	0.47											B	B	B	B				
0R4	0.4	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
0R5	0.5	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
0R6	0.6	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
0R7	0.7	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
0R8	0.8	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
0R9	0.9	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
1R0	1.0	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
1R1	1.1	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
1R2	1.2	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
1R3	1.3	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
1R4	1.4	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
1R5	1.5	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
1R6	1.6	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
1R7	1.7	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
1R8	1.8	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
2R0	2.0	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
2R1	2.1	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
2R2	2.2	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
2R3	2.3	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
2R4	2.4	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
2R5	2.5	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
2R6	2.6	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
2R7	2.7	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
2R8	2.8	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
3R0	3.0	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
3R1	3.1	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
3R2	3.2	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
3R3	3.3	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
3R4	3.4	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
3R6	3.6	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
3R8	3.8	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
3R9	3.9	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
4R0	4.0	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
4R1	4.1	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
4R2	4.2	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
4R3	4.3	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
4R5	4.5	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
4R6	4.6	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
4R7	4.7	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
4R8	4.8	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
5R0	5.0	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
5R1	5.1	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
5R2	5.2	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
5R3	5.3	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
5R6	5.6	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
6R0	6.0	V	V	V	V	C	C	E	E	H	H								
6R2	6.2	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
6R3	6.3	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
6R8	6.8	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
7R0	7.0	V	V	V	V	C	C	E	E	H	H	B	B	B	B				

Dielectric		NPO																	
EIA	Size	01005				0201		0402		0603		0805		1206		1210		1812	
Code	VDCW	10V	16V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V
7R5	7.5	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
8R0	8.0	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
8R2	8.2	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
9R0	9.0	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
9R1	9.1	V	V	V	V	C	C	E	E	H	H	B	B	B	B				
100	10pF	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
110	11	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
120	12	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
130	13	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
140	14	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
150	15	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
160	16											B	B	B	B	J	J	L	L
170	17											B	B	B	B	J	J	L	L
180	18	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
200	20	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
220	22	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
240	24											B	B	B	B	J	J	L	L
250	25	V	V	V	V	C	C	E	E	H	H								
260	26	V	V	V	V	C	C	E	E	H	H								
270	27	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
300	30	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
310	31											B	B	B	B	J	J	L	L
330	33	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
360	36											B	B	B	B	J	J	L	L
390	39	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
400	40											B	B	B	B	J	J	L	L
430	43	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
470	47	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
500	50	V	V	V	V	C	C	E	E	H	H								
510	51	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
530	53											B	B	B	B	J	J	L	L
560	56	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
600	60											B	B	B	B	J	J	L	L
620	62	V	V	V	V	C	C	E	E	H	H								
680	68	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
750	75	V	V	V	V	C	C	E	E	H	H								
820	82	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
910	91											B	B	B	B	J	J	L	L
920	92	V	V	V	V	C	C	E	E	H	H								
101	100pF	V	V	V	V	C	C	E	E	H	H	B	B	B	B	J	J	L	L
111	110											B	B	B	B	J	J	L	L
121	120					C	C	E	E	H	H	B	B	B	B	J	J	L	L
131	130											B	B	B	B	J	J	L	L
141	140											B	B	B	B	J	J	L	L
151	150					C	C	E	E	H	H	B	B	B	B	J	J	L	L
161	160											B	B	B	B	J	J	L	L
181	180					C	C	E	E	H	H	B	B	B	B	J	J	L	L
201	200					C	C	E	E	H	H	B	B	B	B	J	J	L	L
221	220					C	C	E	E	H	H	B	B	B	B	J	J	L	L
241	240					C	C	E	E	H	H	B	B	B	B	J	J	L	L
271	270					C	C	E	E	H	H	B	B	B	B	J	J	L	L
301	300					C	C	E	E	H	H	B	B	B	B	J	J	L	L
331	330					C	C	E	E	H	H	B	B	B	B	J	J	L	L
361	360					C	C	E	E	H	H	B	B	B	B	J	J	L	L
391	390					C	C	E	E	H	H	B	B	B	B	J	J	L	L
431	430					C	C	E	E	H	H								
471	470					C	C	E	E	H	H	B	B	B	B	J	J	L	L
501	500											B	B	B	B	J	J	L	L
511	510					C	C	E	E	H	H	B	B	B	B	J	J	L	L
561	560					C	C	E	E	H	H	B	B	B	B	J	J	L	L
681	680					C	C	E	E	H	H	B	B	B	B	J	J	L	L
751	750							E	E	H	H	B	B	B	B	J	J	L	L
821	820							E	E	H	H	B	B	B	B	J	J	L	L
911	910							E	E	H	H	B	B	B	B	J	J	L	L
102	1nF							E	E	H	H	B	B	B	B	J	J	L	L
122	1.2									H	H	B	B	B	B	J	J	L	L

Multilayer Ceramic Chip Capacitor

Dielectric		NPO																	
EIA	Size	01005				0201		0402		0603		0805		1206		1210		1812	
Code	VDCW	10V	16V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V	25V	50V
152	1.5									H	H	B	B	B	B	J	J	L	L
182	1.8									H	H	B	B	B	B	J	J	L	L
222	2.2									H	H	B	B	B	B	J	J	L	L
272	2.7									H	H	B	B	B	B	J	J	L	L
332	3.3									H	H	B	B	B	B	J	J	L	L
392	3.9											B	B	B	B	J	J	L	L
472	4.7									H	H	B	B	B	B	J	J	L	L
562	5.6									H	H								
682	6.8									H	H	B	B	B	B	J	J	L	L
822	8.2											B	B	B	B	J	J	L	L
103	10nF									H	H	B	B	B	B	J	J	L	L
123	12											J	J	J	J			L	L
223	22											J	J	J	J			L	L
333	33													L	J			L	L
473	47													L	J				
563	56													L	J				
683	68													L	J				
823	82													L	J				
104	100nF													L	J				

■ The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage (X7R 6.3V~50V)

Dielectric		X7R																								
EIA	Size	01005			0201					0402					0603					0805						
Code	VDCW	6.3V	10V	16V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V		
101	100 pF	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
111	110	V	V	V																						
121	120	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H							
131	130				C	C	C	C	C																	
151	150	V	V	V	C	C	C	C	C											B	B	B	B	B		
181	180	V	V	V	C	C	C	C	C						H	H	H	H	H	B	B	B	B	B		
201	200				C	C	C	C	C																	
221	220	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
241	240														H	H	H	H	H							
271	270	V	V	V						E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
331	330	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
361	360														H	H	H	H	H							
391	390	V	V	V	C	C	C	C	C						H	H	H	H	H							
471	470	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
561	560	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
621	620														H	H	H	H	H							
681	680	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
821	820	V	V	V	C	C	C	C	C											B	B	B	B	B		
911	910				C	C	C	C	C																	
102	1nF	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
122	1.2														H	H	H	H	H	B	B	B	B	B		
152	1.5														H	H	H	H	H	B	B	B	B	B		
182	1.8				C	C	C	C	C						H	H	H	H	H	B	B	B	B	B		
222	2.2				C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
272	2.7				C	C	C	C	C						H	H	H	H	H	B	B	B	B	B		
332	3.3				C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
392	3.9				C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
472	4.7				C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
562	5.6				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		

Dielectric		X7R																								
EIA	Size	01005			0201					0402					0603					0805						
Code	VDCW	6.3V	10V	16V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V		
682	6.8				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
822	8.2				C	C	C	C							H	H	H	H	H	B	B	B	B	B		
103	10nF				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
123	12									E	E	E	E	E	H	H	H	H	H							
153	15				C	C	C			E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
183	18				C	C	C			E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
203	20									E	E	E	E	E												
223	22				C	C	C			E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
273	27									E	E	E	E	E	H	H	H	H	H							
303	30														H	H	H	H	H							
333	33					C	C			E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
393	39									E	E	E	E	E	H	H	H	H	H							
473	47									E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
513	51														H	H	H	H	H							
563	56									E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
623	62														H	H	H	H	H							
683	68									E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
823	82														H	H	H	H	H	B	B	B	B	B		
104	100nF									E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
124	120nF									F	F	F	F													
154	150nF									F	F	F	F		H	H	H	H	H	B	B	B	B	B		
184	180nF														H	H	H	H	H							
224	220									F	F	F	F		H	H	H	H	H	B	B	B	B	B		
274	270														H	H	H	H	H	B	B	B	B	B		
334	330									F	F	F			H	H	H	H	H	B	B	B	B	B		
394	390									F	F	F			H	H	H	H	H	B	B	B	B	B		
474	470									F	F	F			H	H	H	H	H	J	J	J	J	J		
564	560														H	H	H	H	H	J	J	J	J	J		
684	680									F	F				H	H	H	H	H	J	J	J	J	J		
824	820														H	H	H	H	H							
105	1uF									F	F				B	B	B	B	B	J	J	J	J	J		
225	2.2														B	B	B	B		J	J	J	J	J		
335	3.3														B	B				J	J	J	J	J		
475	4.7														B	B				J	J	J	J	J		
685	6.8																			J	J	J	J			
106	10uF																			J	J	J	J			

■The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage (X7R 6.3V~50V)

Dielectric		X7R																			
EIA	Size	1206					1210					1808					1812				
Code	VDCW	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V
101	100 pF	B	B	B	B	B															
121	120	B	B	B	B	B															
151	150	B	B	B	B	B															
181	180	B	B	B	B	B															
221	220	B	B	B	B	B															
271	270	B	B	B	B	B															

Dielectric		X7R																			
EIA	Size	1206					1210					1808					1812				
Code	VDCW	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V
331	330	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
391	390	B	B	B	B	B															
471	470	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
561	560	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
681	680	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
821	820	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
102	1nF	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
122	1.2	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
152	1.5	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
182	1.8	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
222	2.2	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
272	2.7	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L					
332	3.3	B	B	B	B	B	J	J	J	J	J										
392	3.9	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
472	4.7	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
562	5.6	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
682	6.8	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
822	8.2	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
103	10nF	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
123	12	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
153	15	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
183	18	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
223	22	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
273	27																L	L	L	L	L
333	33	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
393	39	B	B	B	B	B															
473	47	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
563	56	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
683	68	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
823	82	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
104	100nF	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
124	120											L	L	L	L	L					
154	150	B	B	B	B	B						L	L	L	L	L					
184	180											L	L	L	L	L					
224	220	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
334	330	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
394	390	J	J	J	J	J															
474	470	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
564	560	J	J	J	J	J															
684	680	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
824	820						L	L	L	L	L						L	L	L	L	L
105	1uF	B/L	B/L	B/L	B/L	B/L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
225	2.2	L	L	L	L	L	L	L	L	L	L	S	S	S	S	S	S	S	S	S	S
335	3.3	L	L	L	L	L	L	L	L	L	L	S	S	S	S	S	S	S	S	S	S
475	4.7	L	L	L	L	L	L	L	L	L	L	S	S	S	S	S	S	S	S	S	S

Multilayer Ceramic Chip Capacitor

Dielectric		X7R																				
EIA	Size	1206					1210					1808					1812					
Code	VDCW	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	
685	6.8	L	L	L	L	L	O	O	O	O	O						S	S	S	S	S	
106	10uF	L	L	L	L	L	O	O	O	O	O											
156	15	L	L				O	O	O	O												
226	22	L	L				O	O	O	O												
476	47						O	O														

■ The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage (X5R 6.3V~50V)

Dielectric		X5R																							
EIA	Size	01005			0201					0402					0603					0805					
Code	VDCW	6.3V	10V	16V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	
101	100 pF	V	V	V																					
111	110	V	V	V																					
121	120	V	V	V																					
151	150	V	V	V																					
181	180	V	V	V																					
221	220	V	V	V																					
271	270	V	V	V																					
331	330	V	V	V																					
391	390	V	V	V																					
471	470	V	V	V																					
561	560	V	V	V																					
681	680	V	V	V																					
821	820	V	V	V																					
102	1nF	V	V	V																					
122	1.2	V	V	V																					
152	1.5	V	V	V																					
182	1.8	V	V	V																					
222	2.2	V	V	V																					
272	2.7	V	V	V																					
332	3.3	V	V	V																					
392	3.9	V	V	V																					
472	4.7	V	V	V					C																
562	5.6	V	V	V					C																
682	6.8	V	V	V					C																
822	8.2	V	V	V					C																
103	10nF	V	V	V					C																
153	15	V	V	V	C	C	C	C																	
183	18				C	C	C	C																	
223	22	V	V	V	C	C	C	C																	
333	33	V			C	C	C	C																	
473	47	V			C	C	C	C						E											
563	56				C	C	C	C						E											
683	68	V			C	C	C	C						E											
104	100nF	V			C	C	C	C		E	E	E	E	E											

Multilayer Ceramic Chip Capacitor

Dielectric		X5R																								
EIA	Size	01005			0201					0402					0603					0805						
Code	VDCW	6.3V	10V	16V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V		
124	120									F	F	F	F													
154	150									F	F	F	F													
224	220				C	C				F	F	F	F													
334	330				C	C				F	F	F	F													
394	390									F	F	F	F													
474	470				C	C				F	F	F	F		H	H	H	H	H							
564	560														H	H	H	H	H							
684	680									F	F	F	F		H	H	H	H	H							
824	820														H	H	H	H	H							
105	1uF				D	D				F	F	F	F		B	B	B	B	B	J	J	J	J	J		
225	2.2				D	D				N	N	N	N		B	B	B	B	B	J	J	J	J	J		
335	3.3														B	B	B	B		J	J	J	J	J		
475	4.7				E					N	N	N			B	B	B	B		J	J	J	J	J		
685	6.8									N	N				B	B	B	B		J	J	J	J	J		
106	10uF									N	N				B	B	B	B		J	J	J	J	J		
156	15														B	B				J	J	J	J			
226	22									N	N				B	B				J	J	J	J			
476	47														B					J	J					

■ The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage (X5R 6.3V~50V)

Dielectric		X5R																			
EIA	Size	1206					1210					1808					1812				
Code	VDCW	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V
331	330pF											L	L	L	L	L	L	L	L	L	L
471	470											L	L	L	L	L	L	L	L	L	L
561	560											L	L	L	L	L	L	L	L	L	L
681	680											L	L	L	L	L	L	L	L	L	L
820	820											L	L	L	L	L	L	L	L	L	L
102	1nF											L	L	L	L	L	L	L	L	L	L
122	1.2											L	L	L	L	L	L	L	L	L	L
152	1.5											L	L	L	L	L	L	L	L	L	L
182	1.8											L	L	L	L	L	L	L	L	L	L
222	2.2											L	L	L	L	L	L	L	L	L	L
272	2.7											L	L	L	L	L					
392	3.9											L	L	L	L	L	L	L	L	L	L
472	4.7											L	L	L	L	L	L	L	L	L	L
562	5.6											L	L	L	L	L	L	L	L	L	L
682	6.8											L	L	L	L	L	L	L	L	L	L
822	8.2											L	L	L	L	L	L	L	L	L	L
103	10nF											L	L	L	L	L	L	L	L	L	L
123	12											L	L	L	L	L	L	L	L	L	L
153	15											L	L	L	L	L	L	L	L	L	L
183	18											L	L	L	L	L	L	L	L	L	L
223	22											L	L	L	L	L	L	L	L	L	L

Multilayer Ceramic Chip Capacitor

Dielectric		X5R																			
EIA	Size	1206					1210					1808					1812				
Code	VDCW	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V
273	27																L	L	L	L	L
333	33											L	L	L	L	L	L	L	L	L	L
473	47											L	L	L	L	L	L	L	L	L	L
563	56											L	L	L	L	L	L	L	L	L	L
683	68											L	L	L	L	L	L	L	L	L	L
823	82											L	L	L	L	L	L	L	L	L	L
104	100nF											L	L	L	L	L	L	L	L	L	L
124	120											L	L	L	L	L					
154	150											L	L	L	L	L					
184	180											L	L	L	L	L					
224	220											L	L	L	L	L	L	L	L	L	L
334	330											L	L	L	L	L	L	L	L	L	L
474	470											L	L	L	L	L	L	L	L	L	L
684	680											L	L	L	L	L	L	L	L	L	L
824	820																L	L	L	L	L
105	1uF	B/L	B/L	B/L	B/L	B/L						L	L	L	L	L	L	L	L	L	L
225	2.2	L	L	L	L	L						L	L	L	L		S	S	S	S	S
335	3.3	L	L	L	L	L						L	L	L	L		S	S	S	S	S
475	4.7	L	L	L	L	L	L	L	L	L	L	L	L	L	L		S	S	S	S	S
685	6.8	L	L	L	L	L	L	O	O	O	O	L	L	L	L		S	S	S	S	S
106	10uF	L	L	L	L	L	L	O	O	O	O						S	S	S	S	S
156	15	L	L	L	L		L	O	O	O	O										
226	22	L	L	L	L		O	O	O	O											
476	47	L	L	L			O	O	O												
107	100uF	L	L				O	O													

■ The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage X6S/X6T 6.3V~50V)

Dielectric		X6S/X6T																						
EIA	Size	01005			0201					0402					0603					0805				
Code	VDCW	6.3V	10V	16V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V
101	100 pF	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B
111	110	V	V	V																				
121	120	V	V	V	C	C	C	C	C						H	H	H	H	H					
131	130				C	C	C	C	C															
151	150	V	V	V	C	C	C	C	C											B	B	B	B	B
181	180	V	V	V	C	C	C	C	C											B	B	B	B	B
201	200				C	C	C	C	C															
221	220	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B
271	270	V	V	V																B	B	B	B	B
331	330	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B
361	360														H	H	H	H	H					
391	390	V	V	V	C	C	C	C	C						H	H	H	H	H					
471	470	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B
561	560	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B
621	620														H	H	H	H	H					

Dielectric		X6S/X6T																								
EIA	Size	01005			0201					0402					0603					0805						
Code	VDCW	6.3V	10V	16V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V		
681	680	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
821	820	V	V	V	C	C	C	C	C						H	H	H	H	H	B	B	B	B	B		
911	910				C	C	C	C	C																	
102	1nF	V	V	V	C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
122	1.2														H	H	H	H	H	B	B	B	B	B		
152	1.5														H	H	H	H	H	B	B	B	B	B		
182	1.8				C	C	C	C	C						H	H	H	H	H	B	B	B	B	B		
222	2.2				C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
272	2.7				C	C	C	C	C						H	H	H	H	H	B	B	B	B	B		
332	3.3				C	C	C	C	C	E	E	E	E	E						B	B	B	B	B		
392	3.9				C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
472	4.7				C	C	C	C	C	E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
562	5.6				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
682	6.8				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
822	8.2				C	C	C	C							H	H	H	H	H	B	B	B	B	B		
103	10nF				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
123	12									E	E	E	E	E	H	H	H	H	H							
153	15				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
183	18				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
203	20									E	E	E	E	E												
223	22				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
273	27									E	E	E	E	E	H	H	H	H	H							
303	30														H	H	H	H	H							
333	33				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
393	39									E	E	E	E	E	H	H	H	H	H							
473	47				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
513	51														H	H	H	H	H							
563	56				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
623	62														H	H	H	H	H							
683	68				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
823	82														H	H	H	H	H	B	B	B	B	B		
104	100nF				C	C	C	C		E	E	E	E	E	H	H	H	H	H	B	B	B	B	B		
124	120									F	F	F	F													
154	150									F	F	F	F		H	H	H	H	H	B	B	B	B	B		
184	180														H	H	H	H	H							
224	220									F	F	F			H	H	H	H	H	B/J	B/J	B/J	B/J	B/J		
274	270														H	H	H	H	H	B	B	B	B	B		
334	330									F	F	F			H	H	H	H	H	B	B	B	B	B		
394	390									F	F	F			H	H	H	H	H	B	B	B	B	B		
474	470									F	F	F			H	H	H	H	H	B/J	B/J	B/J	B/J	B/J		
564	560														H	H	H	H	H	B/J	B/J	B/J	B/J	B/J		
684	680									F	F	F			H	H	H	H	H	B/J	B/J	B/J	B/J	B/J		
824	820														H	H	H	H	H							
105	1uF									F	F	F			B	B	B	B	B	J	J	J	J	J		
225	2.2									N	N	N			B	B	B	B		J	J	J	J	J		
335	3.3														B	B				J	J	J	J	J		
475	4.7									N	N				B	B				J	J	J	J	J		
685	6.8									N					B	B				J	J	J	J			
106	10uF									N					B	B				J	J	J	J			
156	15														B					J	J	J				

Dielectric		X6S/X6T																							
EIA	Size	01005			0201					0402					0603					0805					
Code	VDCW	6.3V	10V	16V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	
226	22														B					J	J	J			
476	47																			J					

■The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage X6S/X6T 6.3V~50V)

Dielectric		X6S/X6T																			
EIA	Size	1206					1210					1808					1812				
Code	VDCW	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V
101	100 pF	B	B	B	B	B															
121	120	B	B	B	B	B															
151	150	B	B	B	B	B															
181	180	B	B	B	B	B															
221	220	B	B	B	B	B															
271	270	B	B	B	B	B															
331	330	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
391	390	B	B	B	B	B															
471	470	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
561	560	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
681	680	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
821	820	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
102	1nF	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
122	1.2	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
152	1.5	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
182	1.8	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
222	2.2	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
272	2.7	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L					
332	3.3	B	B	B	B	B	J	J	J	J	J										
392	3.9	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
472	4.7	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
562	5.6	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
682	6.8	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
822	8.2	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
103	10nF	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
123	12	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
153	15	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
183	18	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
223	22	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
273	27																L	L	L	L	L
333	33	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
393	39	B	B	B	B	B															
473	47	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
563	56	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
683	68	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
823	82	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
104	100nF	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
124	120											L	L	L	L	L					
154	150	B	B	B	B	B						L	L	L	L	L					

Multilayer Ceramic Chip Capacitor

Dielectric		X6S/X6T																			
EIA	Size	1206					1210					1808					1812				
Code	VDCW	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V
184	180											L	L	L	L	L					
224	220	B	B	B	B	B	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L
334	330	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
394	390	J	J	J	J	J															
474	470	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
564	560	J	J	J	J	J															
684	680	J	J	J	J	J	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
824	820						L	L	L	L	L						L	L	L	L	L
105	1uF	B/L	B/L	B/L	B/L	B/L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
225	2.2	L	L	L	L	L	L	L	L	L	L	S	S	S	S	S	S	S			
335	3.3	L	L	L	L	L	L	L	L	L	L	S	S	S	S	S	S	S			
475	4.7	L	L	L	L	L	L	L	L	L	L	S	S	S	S	S	S	S			
685	6.8	L	L	L	L	L	O	O	O	O	O						S	S			
106	10uF	L	L	L	L	L	O	O	O	O	O										
156	15	L	L	L			O	O	O	O											
226	22	L	L	L			O	O	O	O											
476	47	L					O	O													
107	100uF	L					O														

■ The letter in cell is expressed the symbol of product thickness

■ Middle and High Voltage

Capacitance & Voltage (NPO 100V~3KV)

Dielectric		NPO																
EIA	Size	0402	0603			0805					1206							
Code	VDCW	100V	100V	200V	250V	100V	200V	250V	500V	1000V	100V	200V	250V	500V	630V	1000V	2000V	3000V
0R5	0.5pF													B	J	J		
1R0	1.0													B	J	J		
1R2	1.2													B	J	J		
1R5	1.5													B	J	J		
1R8	1.8													B	J	J		
2R0	2.0													B	J	J	J	
2R2	2.2													B	J	J	J	
2R7	2.7													B	J	J	J	
3R0	3.0													B	J	J	J	
3R3	3.3													B	J	J	J	
3R6	3.6													B	J	J	J	
3R9	3.9													B	J	J	J	
4R7	4.7													B	J	J	J	
5R0	5.0													B	J	J	J	
5R6	5.6													B	J	J	J	
6R8	6.8									B				J	J	J	J	
8R0	8.0									B				J	J	J	J	
8R2	8.2									B				J	J	J	J	
100	10pF					B				J				J	J	J	J	
120	12					B			B	J				J	J	J	J	
150	15					B			B	J				J	J	J	J	
180	18					B			B	J				J	J	J	J	

Multilayer Ceramic Chip Capacitor

Dielectric		NPO																
EIA	Size	0402	0603				0805					1206						
Code	VDCW	100V	100V	200V	250V	100V	200V	250V	500V	1000V	100V	200V	250V	500V	630V	1000V	2000V	3000V
220	22		H			B			B	J				J	J	J	J	
270	27		H			B			B	J		B		J	J	J	J	
330	33	E	H			B			B	J		B		J	J	J	J	
390	39	E	H			B			B	J		B		J	J	J	J	L
470	47	E	H			B			B	J		B		J	J	J	J	
560	56	E	H			B			B	J		B		J	J	J	J	
680	68	E	H			B			B	J		B	B	J	J	J	L	
101	100pF	E	H	H		B	B	B	B	J		B	B	J	J	J	L	
121	120	E	H	H		B	B	B	B			B	B	J	J	J	L	
151	150	E	H	H		B	B	B	B		B	B	B	J	J	J	L	
181	180	E	H	H	H	B	B	B	J		B	B	B	J	J	J	L	
221	220	E	H	H	H	B	B	B	J		B	B	B	J	J	J	L	
271	270	E	H	H	H	B	B	B	J		B	B	B	J	J	J		
331	330		H	H	H	B	B	B	J		B	B	B	J	J	J		
391	390		H	H		B	B	B	J		B	B	B	J	J	J		
471	470		H	H		B	B	B	J		B	B	B	J	J	J		
561	560		H			B	B	B			B	B	B	J	J	L		
681	680		H			B	B	B			B	B	B	J	J	L		
102	1nF		H			B	B	B			B	J	B	L	L	L		
152	1.5					B					B		B	L	L			
182	1.8					B					B		B					
222	2.2					B					B		B					
272	2.7					B												
332	3.3					B												

■The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage (NPO 100V~5KV)

Dielectric		NPO																	
EIA	Size	1210					1808					1812							
Code	VDCW	100V	200V	500V	1000V	2000V	500V	1000V	2000V	3000V	5000V	100V	200V	500V	630V	1000V	2000V	3000V	5000V
1R0	1.0pF									L									L
1R2	1.2									L									L
1R5	1.5									L									L
1R8	1.8									L									L
2R0	2.0									L									L
2R2	2.2									L									L
2R7	2.7									L									L
3R0	3.0									L	L								L
3R3	3.3									L	L					L		L	L
3R6	3.6									L	L					L		L	L
3R9	3.9									L	L					L		L	L
4R7	4.7									L	L					L		L	L
5R0	5.0									L	L					L		L	L
5R6	5.6									L	L					L		L	L
6R8	6.8									L	L					L		L	L
8R0	8.0									L	L					L		L	L
8R2	8.2									L	L					L		L	L
100	10pF			J						L	L					L		L	L
120	12			J						L	L					L		L	L
150	15			J						L	L					L		L	L
180	18			J						L	L					L		L	L
220	22			J						L	L			J		L	L	L	L
270	27			J						L	L			J		L	L	L	

Multilayer Ceramic Chip Capacitor

Dielectric		NPO																	
EIA	Size	1210						1808					1812						
Code	VDCW	100V	200V	500V	1000V	2000V	500V	1000V	2000V	3000V	5000V	100V	200V	500V	630V	1000V	2000V	3000V	5000V
330	33			J				L		L	L			J		L	L	L	
390	39			J		J		L		L	L			J		L	L	L	
470	47			J		L		L		L	L			J		L	L	L	
560	56			J		L		L		L	L	J		J		L	L	L	
680	68			J	J	L		L		L	L	J		J		L	L	L	
101	100pF	J	J	J	J	L		L	L	L	S	J		J		L	L	L	
121	120	J		J	L	L		L	L	L		J		J		L	L	L	
151	150	J		J	L	L		L	L	L		J		J		L	L	L	
181	180	J		J	L	L		L	L	L		J		J		L	L	L	
221	220	J		J	L	P		L	L	L		J		J		L	L	L	
271	270	J		J	L	P		L	L	S		J		J		L	L	L	
331	330	J		J	L	S	L	L	L	S		J		J		L	L	S	
391	390	J		J	L		L	L	L			J		J		L	L	S	
471	470	J		J	L		L	L	L			J		J		L	L	S	
561	560	J		J	L		L	L	S			J		J		L	L	S	
681	680	J		J	L		L	L	S			J		J		L	S		
102	1nF	J		L	S		L	L	S			J		J	L	L	S		
152	1.5	J		L	S		P		S			J		L	L	L			
182	1.8	J		L	S		P		S			J		L	L	O			
222	2.2	J		P	O		P					J		L	L	O			
272	2.7	J		S	O		P					J		L	L				
332	3.3	J			O		P					J		L	L				
392	3.9											J	J	L	L				
472	4.7	J			O		P					J	J	L	L				
562	5.6	J			O														
682	6.8	J			O														
103	10nF																		
153	15																		
223	22											O							
333	33											O							

■ The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage (NPO 250V~3KV)

Dielectric		NPO														
EIA	Size	1825				2220						2225				
Code	VDCW	200V	630V	1000V	3000V	250V	500V	1000V	2000V	3000V	5000V	1000V	1500V	2000V	2500V	3000V
100	10pF															L
120	12						L									L
150	15						L								L	L
180	18						L								L	L
220	22				L		L								L	L
270	27						L								L	L
330	33						L								L	L
390	39						L								L	L
470	47						L								L	L
560	56						L								L	L
680	68						L								L	L
101	100pF						L				L			L	L	L
121	120						L							L	L	L
151	150						L			L				L	L	L
181	180						L			L				L	L	L

Multilayer Ceramic Chip Capacitor

Dielectric		NPO														
EIA	Size	1825				2220						2225				
Code	VDCW	200V	630V	1000V	3000V	250V	500V	1000V	2000V	3000V	5000V	1000V	1500V	2000V	2500V	3000V
221	220						L			L				L	L	L
271	270						L		L	L				L	L	L
331	330						L		L	L				L		L
391	390						L		L	L			L	S		S
471	470						L		L	L			L	S		S
561	560						L		L	L			L	S		S
681	680					L	L		L	L			L	S		S
102	1nF					L	L	L	L	S		L	L	S		S
152	1.5					L	L	S		O						S
182	1.8					L	L	S		O						O
222	2.2					L	L	S		O						O
272	2.7					L	L	S								O
332	3.3					L	L	S								O
392	3.9					L	L	S								
472	4.7					L	L	S								
562	5.6					L		S								
682	6.8					L		S								
103	10nF			S		L										
153	15		L			L										
223	22															
333	33	L														

■The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage (X7R 100V~2.5KV)

Dielectric		X7R																		
EIA	Size	0402	0603			0805							1206							
Code	VDCW	100V	100V	200V	250V	100V	200V	250V	500V	630V	1000V	2000V	100V	200V	250V	500V	630V	1000V	2000V	2500V
101	100pF		H					B	B				B	B		B	J	J	J	
121	120		H					B	B				B	B		B		J	J	
151	150		H					B	B				B	B		B		J	J	
181	180		H					B	B				B	B		B		J	J	
221	220		H			B	B	B	B				B	B		B		J	J	
271	270		H			B	B	B	B				B	B		B		J	J	
331	330		H	H		B	B	B	B				B	B	B	B		J	J	
391	390		H	H		B	B	B	B				B	B	B	B		J	J	
471	470	E	H	H		B	B	B	B				B	B	B	B		J	J	
561	560	E	H	H		B	B	B	B				B	B	B	B		J	J	
681	680	E	H	H		B	B	B	B				B	B	B	B		J	J	
102	1nF	E	H	H		B	B	B	B	B	J	J	B	B	B	B		J	J	J
152	1.5	E	H	H		B	B	B	B	B	J		B	B	B	B		J	J	
182	1.8	E	H	H		B	B	B	B	B	J		B	B	B	B		J	J	
222	2.2	E	H	H		B	B	B	B	B	J		B	B	B	B	B	J	J	
272	2.7	E	H	H		B	B	B	B	B			B	B	B	J	J	J	J	
332	3.3	E	H	H	H	B	B	B	B	B			B	B	B	J	J	J	J	
472	4.7	E	H	H	H	B	B	B	B	B			B	B	B	J	J	J	J	

Multilayer Ceramic Chip Capacitor

Dielectric		X7R																		
EIA	Size	0402	0603				0805						1206							
Code	VDCW	100V	100V	200V	250V	100V	200V	250V	500V	630V	1000V	2000V	100V	200V	250V	500V	630V	1000V	2000V	2500V
562	5.6	E	H	H	H	B	B	J	J	B			B	B	B	J	J	J	J	
682	6.8												B	B	B	J	J	J	L	
103	10nF	E	H	H	H	B	B	J	J				B	B	B	J	J	J		
123	12					B														
153	15		H			B	J	J	J				B	B	B	J	J			
183	18		H			B	J	J	J				B	B	B	J	J			
223	22		H			B	J	J	J				B	B	B	J	J			
333	33		H			J	J	J	J				B	J	J	J	L			
473	47		H			J			J				B	J	J	J	L			
563	56		H			J			J				B	J	J	L				
683	68		H			J			J				J	J	J	L				
104	100nF		H			J			J				J	J	L	L				
224	220					J							J	L	L					
334	330					J							J							
474	470					J							L							
684	680					J							L							
105	1.0uF					J							L							
225	2.2					J							L							
335	3.3					J														
475	4.7					J														

■ The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage (X7R 100V~5KV)

Dielectric		X7R														
EIA	Size	1210							1808							
Code	VDCW	100V	200V	250V	500V	630V	1000V	2000V	100V	250V	500V	1000V	2000V	3000V	4000V	5000V
101	100pF												L	L		
121	120												L	L		
151	150												L	L		L
181	180												L	L		L
221	220						J	J				L	L	L		L
271	270						J	J				L	L	L		L
331	330						J	J				L	L	L		L
391	390						J	J				L	L	L		L
471	470						J	J	L			L	L	L		L
561	560						J	J	L			L	L	L		L
681	680					J	J	J	L			L	L	L		L
102	1nF			L		J	J	J	L	L		L	L	L	L	L
152	1.5			L		J	J	J	L	L		L	L	L		
182	1.8			L		J	J	J	L	L		L	L	L		
222	2.2			L		J	J	J	L	L		L	L	L		
272	2.7			L		J	J	J	L	L		L	L	L		
332	3.3			L	J	J	J	J	L	L		L	L	L		
472	4.7	J		L	J	J	L	L	L	L		L	L	L		

Multilayer Ceramic Chip Capacitor

Dielectric		X7R														
EIA	Size	1210							1808							
Code	VDCW	100V	200V	250V	500V	630V	1000V	2000V	100V	250V	500V	1000V	2000V	3000V	4000V	5000V
562	5.6	J		L	J	J	L	L	L	L		L	L			
682	6.8	J		L	J	J	L	L	L	L		L	L			
103	10nF	J		L	J	J	L	L	L	L		L	L			
153	15	J		L	J	J	L		L	L		L				
183	18	J		L	J	J	L		L	L		L				
223	22	J		L	J	J	L		L	L		L				
333	33	J		L	L	J			L	L						
473	47	J	J	L	L	S			L	L	L					
563	56	J		L	L	L			L	L						
683	68	J		L	L	L			L	L						
104	100nF	J		L	L	L			L	L						
224	220	L		O					L	L						
334	330	L		O					L	L						
474	470	L							L	L						
684	680	L														
105	1.0uF	L														
225	2.2	O														
335	3.3	O														
475	4.7	O														

■ The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage (X7R 100V~5KV)

Dielectric		X7R															
EIA	Size	1812										1825					
Code	VDCW	100V	200V	250V	500V	630V	1000V	2000V	3000V	4000V	5000V	200V	500V	630V	1000V	2000V	3000V
151	150pF								L	L							
181	180								L	L							
221	220							L	L	L							
271	270							L	L	L							
331	330						L	L	L	L							
391	390						L	L	L	L							
471	470						L	L	L	L							
561	560						L	L	L	L							
681	680			L			L	L	L	L							
102	1nF		L	L			L	L	L	L						L	
152	1.5		L	L			L	L	L	L						L	
182	1.8		L	L	L		L	L	L	L						L	
222	2.2		L	L	L		L	L	L	L	S					L	
272	2.7		L	L	L		L	L	L	P						L	
332	3.3		L	L	L		L	L	L	P						L	
392	3.9															L	
472	4.7		L	L	L		L	L	L							L	P
562	5.6		L	L	L		L	L	S							L	S
682	6.8		L	L	L		L	L	S							L	S

Multilayer Ceramic Chip Capacitor

Dielectric		X7R															
EIA	Size	1812										1825					
Code	VDCW	100V	200V	250V	500V	630V	1000V	2000V	3000V	4000V	5000V	200V	500V	630V	1000V	2000V	3000V
103	10nF	J	L	L	L		L	L	O						L	L	S
153	15	J	L	L	L		L	S							L	L	
183	18	J	L	L	L		L	S							L	L	
223	22	J	L	L	L	L	L								L	L	
333	33	J	L	L	J	L	L						L		L		
473	47	J	L	L	L	L	L						L		L		
563	56	J	L	L	L	L	S						L		L		
683	68	J	L	L	L	L							L		L		
104	100nF	J	L	L	L	S						L	L		S		
124	120												L				
154	150												L	L			
224	220	J	L	S	S	S							L				
334	330	J	S	S													
474	470	J	S	O													
684	680	S	S	S													
105	1uF	S	S	S													
225	2.2	O															
335	3.3																
475	4.7																
685	6.8																
106	10uF																

■The letter in cell is expressed the symbol of product thickness

Capacitance & Voltage (X7R 100V~5KV)

Dielectric		X7R																				
EIA	Size	2220											2225									
Code	VDCW	100V	200V	250V	500V	630V	1KV	2KV	2.5KV	3KV	4KV	5KV	100V	200V	250V	500V	1KV	1.5KV	2KV	3KV	4KV	5KV
151	150pF																			L		
181	180																			L		
221	220																L			L		
271	270																L			L		
331	330				L												L			L		
391	390				L												L			L		
471	470				L												L			L		
561	560				L												L			L		
681	680				L												L			L		
102	1nF				L			L		L	L	L			L		L			L		
152	1.5				L			L		L	L	L			L		L			L		L
182	1.8				L			L		L	L	L			L		L			L		
222	2.2			L	L			L		L	L	S			L		L		L	L	P	
272	2.7			L	L			L		L	L	S			L		L		L	L		
332	3.3			L	L			L		L	L	S			L	L	L		L	L		
392	3.9			L	L			L		L	L	S			L	L	L		L	L		
472	4.7			L	L		L	L		L	L	S			L	L	L		L	L		


Dielectric		X7R																				
EIA	Size	2220											2225									
Code	VDCW	100V	200V	250V	500V	630V	1KV	2KV	2.5KV	3KV	4KV	5KV	100V	200V	250V	500V	1KV	1.5KV	2KV	3KV	4KV	5KV
562	5.6			L	L		L	L		L	L				L	L	L		L	L		
682	6.8			L	L		L	L		L	L				L	L	L		L	L		
822	8.2			L	L		L	L		L	L											
103	10nF			L	L		L	L	L	L					L	L	L		L	L		
153	15			L	L		L	L							L	L	L		L	L		
183	18			L	L		L	L							L	L	L		L	P		
223	22			L	L		L	L							L	L	L		L	P		
333	33			L	L		L	L							L	L	L		S			
473	47		L	L	L		L	L							L	L	L		P			
563	56		L	L	L		S								L	L	P		S			
683	68		L	L	L		S								L	L	P		S			
104	100nF		L	L	L		S						L		L	L	P	S	S			
124	120		L	L	L		S						L		L	L	S					
154	150		L	L	L	L	S						L		L	L						
224	220		L	L	L	L	S						L		L	L						
334	330		L	L	L	L							L		L	L						
474	470	L	L	L	L	S							L	L	L	L						
684	680	L	L	L											L	S						
105	1uF	L		L											S	O						
225	2.2	P		S											S							
335	3.3	S																				
475	4.7	S																				
685	6.8	S																				
106	10uF	S																				

■ The letter in cell is expressed the symbol of product thickness

■ Environmental Characteristics

Item	Requirement			Test Method
Capacitance	Should be within the specified tolerance			NPO: (Class I) Cap≤ 1000pF 1.0±0.2Vrms, 1MHz±10% Cap>1000pF 1.0±0.2Vrms, 1KHz±10% X7R, X5R, X6S, X6T: (Class II) Test Temperature: 25℃±3℃ Test Frequency: 1KHz±10% Test Voltage: 1.0±0.2Vrms
Insulation Resistance	Class I : C≤10 nF, Ri≥50000MΩ C> 10 nF, Ri•CR≥500S Class II: C≤25 nF, Ri≥10000MΩ C> 25 nF, Ri•CR>100S Note: S=Ω•F			Measuring Voltage: Rated Voltage (Max 500V) Duration: 60±5s Test Humidity: ≤75% Test Temperature: 25±3℃ Test Current: ≤50mA
(DF, tanδ) Dissipation Factor	NPO: Cap≥ 30pF, DF ≤0.1%; Cap<30pF, DF ≤1/ (400+20C) X7R, X5R, X6S, X6T:			NPO: (Class I) Cap≤ 30pF 1.0±0.2Vrms, 1MHz±10% (C> 1000 pF , 1KHz±10%) Cap> 30pF 1.0±0.2Vrms, 1MHz±10% (C> 1000 pF , 1KHz±10%) X7R, X5R, X6S, X6T: (Class II) C≤10μF Test Frequency:1KHz±10%
	Rated vol.	DF(×10-4)		
	50V	≤250	0402≤10nF; 0603<100nF; ≥1206≤680nF	
		≤350	0201≤3.3nF; 0402≤47nF; 0603<470nF; 0805≤1uF; ≥1206≤2.2uF	
		≤500	0201≤10nF; 0402≤0.1μF	
		≤750	0805≤2.2uF; ≥1206≤4.7uF	
≤1000		0603≤2.2uF; 0805≤10uF; ≥1206≤10uF		

Multilayer Ceramic Chip Capacitor

Item	Requirement			Test Method		
	25V	≤250	0402≤10nF; 0603<100nF; ≥1206≤680nF		Test Voltage:1.0±0.2Vrms C>10μF Test Frequency:120±24Hz Test Voltage:0.5 ±0.1Vrms	
		≤350	0201≤3.3nF; 0402≤47nF; 0603<470nF; 0805≤1uF			
		≤500	0201≤10nF; 0402≤0.22μF			
		≤750	0201>10nF; 0805≤2.2μF; ≥1206≤10μF			
		≤1000	0201≤100nF; 0402≤2.2μF; 0603≤10μF; 0805≤22μF; ≥1206≤22μF			
	16V	≤250	0402≤10nF; 0603<100nF; ≥1206≤680nF			
		≤350	01005≤1nF; 0201≤3.3nF; 0402≤47nF; 0603<470nF; 0805≤1uF			
		≤500	0201≤15nF; 0402≤220nF			
		≤750	01005≤10nF; 0201≤47nF; 0805≤4.7μF; ≥1206≤10μF			
		≤1000	0201≤100nF; 0402≤4.7μF; 0603≤10μF; 0805≤22μF; ≥1206≤47μF			
	10V	≤250	0402≤10nF; 0603<100nF; ≥1206≤680nF			
		≤350	01005≤1nF; 0201≤3.3nF; 0402≤47nF; 0603<470nF; 0805≤1uF			
		≤500	0201≤15nF; 0402≤220nF			
		≤750	01005≤10nF; 0201≤47nF; 0805≤2.2μF; ≥1206≤10μF			
		≤1000	0201≤2.2μF; 0402≤10μF; 0603≤22μF 0805≤47μF; ≥1206≤47μF			
	≤6.3V	≤250	0402≤10nF; 0603<100nF; ≥1206≤680nF			
		≤350	01005≤1nF; 0201≤3.3nF; 0402 47nF; 0603<470nF; 0805≤1uF			
		≤500	0201≤15nF; 0402≤220nF			
		≤750	01005≤10nF; 0201≤47nF; 0805≤2.2uF; ≥1206≤10μF			
		≤1000	01005≤100nF; 0201≤2.2μF; 0402≤10μF; 0603≤47μF; 0805≤47μF; ≥1206≤100uF			
	Dielectric Withstanding Voltage(DWV) (For ≤50V)	No breakdown or damage.				Measuring Voltage: Class I :300% Rated voltage Class II :250% Rated voltage Duration: 1~5s Charge/ Discharge Current: 50mA max. (This method excludes high-voltage MLCC)
	Solderability	At least 95% of the terminal electrode is covered by new solder. Visual Appearance: No visible damage.				Preheating conditions:80 to 120℃; 10~30s. Lead-free soldering Solder Temperature: 245±5℃ Duration: 2±0.5s
	Resistance to Flexure of Substrate (Bending Strength)	Appearance: No visible damage ΔC/C: Class I : ≤±5% or ±0.5pF, whichever is larger Class II: ≤±10%				Test Board: PCB Warp: 1mm Speed: 1 mm/sec. Unit: mm The measurement should be made with the board in the bending position. 
	Resistance to Soldering Heat	Item	NPO	X7R, X5R, X6S, X6T		Preheating conditions: 100 to 200℃; 60~120s. Solder Temperature: 265±5℃ Duration: 10±1s Clean the capacitor with solvent and examine it with a 10X(min.) microscope. Recovery Time: 24±2h Recovery condition: Room temperature
		ΔC/C	≤±2.5% or ±0.25pF whichever is larger	±15%		
DF		Same to initial value				
IR		Same to initial value				
Appearance : No visible damage. At least 95% of the terminal electrode is covered by new solder.						
Termination Adhesion	No visible damage			Applied Force: ≤0402 size: 2N ; ≥0603 size: 5N Duration: 10±1S		

Multilayer Ceramic Chip Capacitor

Item	Requirement	Test Method															
Temperature Cycle	NPO: ΔC/C:≤±1% or ±1pF, whichever is larger. X7R, X5R, X6S, X6T: ΔC/C: -15%~+15%	Preheating conditions: up-category temperature, 1h Recovery time: 24±1h Initial Measurement Cycling Times: 5 times, 1 cycle, 4 steps: <table><tr><th>Step</th><th>Temp.(℃)</th><th>Time (min)</th></tr><tr><td>1</td><td>Low- category temp NPO/X7R/X5R : -55</td><td>30</td></tr><tr><td>2</td><td>Normal temp. (+25)</td><td>2-3</td></tr><tr><td>3</td><td>Up- category temp NPO/X7R/ : +125 X5R: +85 X6S/X6T:+105</td><td>30</td></tr><tr><td>4</td><td>Normal temp. (+20)</td><td>2-3</td></tr></table> Recovery time after test: 24±2h	Step	Temp.(℃)	Time (min)	1	Low- category temp NPO/X7R/X5R : -55	30	2	Normal temp. (+25)	2-3	3	Up- category temp NPO/X7R/ : +125 X5R: +85 X6S/X6T:+105	30	4	Normal temp. (+20)	2-3
Step	Temp.(℃)	Time (min)															
1	Low- category temp NPO/X7R/X5R : -55	30															
2	Normal temp. (+25)	2-3															
3	Up- category temp NPO/X7R/ : +125 X5R: +85 X6S/X6T:+105	30															
4	Normal temp. (+20)	2-3															
Humidity Load	NPO: ΔC/C :±7.5% or ±0.75pF, whichever is larger. X7R, X5R, X6S, X6T: ΔC/C: ≤±12.5% DF: Not more than twice of initial value. IR: NPO: Ri≥5000MΩ or Ri• CR≥ 50S whichever is smaller X7R, X5R, X6S, X6T: Ri≥1000MΩ or Ri• CR≥10S whichever is smaller. Appearance: No visible damage	Humidity: 90~95%RH Voltage: Rated Voltage Duration: 500h Recovery Time: 24h±2h Class 2 : 0201≥47nF、0402≥33nF、0603≥1μF、0805≥4.7μF、1206≥10μF product need to keep in 150 ℃ 、1h after the test , and measurement to be made after being kept at room temperature for 24±2h.															
Life Test	NPO: ΔC/C :≤±3% or ±0.3pF,whichever is larger. X7R, X5R, X6S, X6T: ΔC/C :±20% DF: Not more than twice of initial value. IR: NPO: Ri≥4000MΩ or Ri• CR≥40S whichever is smaller X7R/X5R: Ri≥2000MΩ or Ri• CR≥50S whichever is smaller. Visual Appearance: No visible damage	Low-Voltage (<100V) Applied Voltage: 2*Ur , except the table 1 Duration: 1000h Temperature : 125℃ (NPO 、X7R 、X7S) 85℃ (X5R) 105℃ (X6S 、X6T) Charge/ Discharge Current: 50mA max. Recovery Time: 24h±2h Class 2 : 0201≥47nF、0402≥33nF、0603≥1μF、0805≥4.7μF、1206≥10μF product need to keep in 150℃ 、1h after the test , and measurement to be made after being kept at room temperature for 24±2h. <table><tr><th>Capacitance</th><th>Voltage</th><th>Capacitance</th><th>Voltage</th></tr><tr><td>0201≥10nF</td><td rowspan="3">1.5Ur</td><td>0805≥0.47uF</td><td rowspan="3">1.5Ur</td></tr><tr><td>0402≥47nF</td><td>1206≥1uF</td></tr><tr><td>603≥220nF</td><td>1210≥1uF</td></tr></table>	Capacitance	Voltage	Capacitance	Voltage	0201≥10nF	1.5Ur	0805≥0.47uF	1.5Ur	0402≥47nF	1206≥1uF	603≥220nF	1210≥1uF			
Capacitance	Voltage	Capacitance	Voltage														
0201≥10nF	1.5Ur	0805≥0.47uF	1.5Ur														
0402≥47nF		1206≥1uF															
603≥220nF		1210≥1uF															

■ Pretreatment (only for class 2 capacitor) is a method to treat the capacitor before measurement. First, place the capacitor in the up-category temperature or other specified higher temperature environment for 1 hour. Then recovery the capacitor at standard pressure conditions for 24 ± 1 hours.

■ Storage Temperature: $5 \sim 40^\circ\text{C}$; Relative Humidity 20 ~70 %RH


■ Shelf life: 1 years Max

■ Packaging

Packaging Quantity

Type	Packaging (7" Reel)		Packaging (13" Reel)	
	Paper tape	Plastic tape	Paper tape	Plastic tape
01005	20K	-	-	-
0201	15K	-	70K	-
0402	10K	-	50K	-
0603	4K	-	15K	-
0805	4K	T≤1.35mm 3K T>1.35mm 2K	15K	K0 : 1.35 10K
1206	4K	T≤1.35mm 3K	15K	K0 : 1.35 10K
		T>1.35mm 2K		K0 : 1.80 8K
1210	-	T≤1.80mm 2K	-	K0 : 1.80 8K
		T>1.80mm 1K		
1808	-	2K	-	8K
1812	-	T≤1.85mm 1K	-	3K
		T>1.85mm 0.5K		
2220	-	0.5K	-	-
2225	-	0.5K	-	-


Tape and Reel

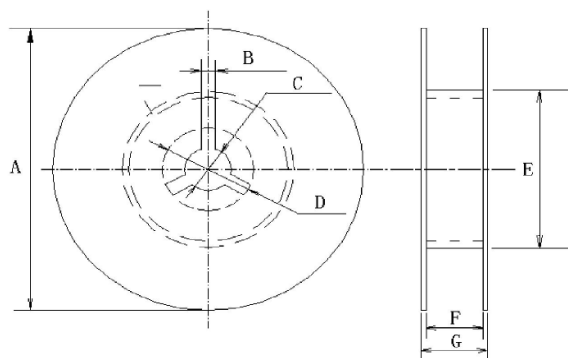

Unit: mm


Reel Diameter	A	B	C	D	E	F	G
7"	178±2.0	3.0	13.0±0.5	21.0±0.8	50 or more	10.0±1.5	12 max
13"	330±2.0	3.0	13.0±0.5	21.0±0.8	92~100	10.0±1.5	12 max

Paper Tape Size Specification

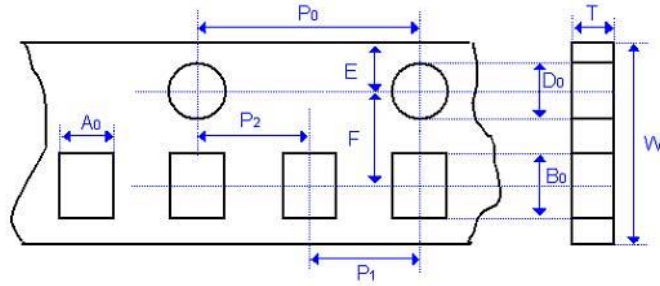

Unit: mm


Type	A0	B0	T	W	P0	P1	P2	D0	E	F
01005	0.24±0.20	0.45±0.02	0.30 Below	8.00±0.10	4.00±0.10	2.00±0.05	2.00±0.05	1.5-0/+0.10	1.75±0.10	3.50±0.05
0201	0.37±0.10	0.67±0.10	0.80 Below	8.00±0.10	4.00±0.10	2.00±0.05	2.00±0.05	1.5-0/+0.10	1.75±0.10	3.50±0.05
0402	0.65±0.10	1.15±0.10	0.80 Below	8.00±0.10	4.00±0.10	2.00±0.05	2.00±0.05	1.5-0/+0.10	1.75±0.10	3.50±0.05

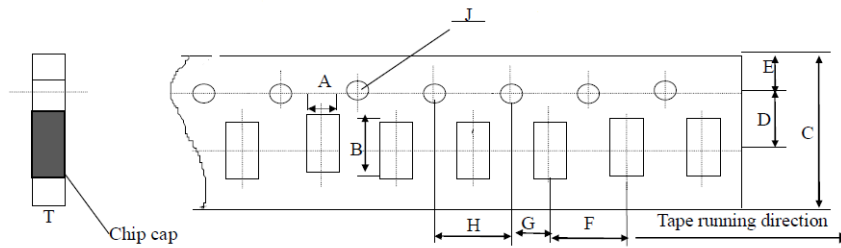

Unit: mm

Type	A	B	C	D	E	F	G	H	J	T
0603	1.10±0.10	1.90±0.10	8.00±0.10	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.10	4.00±0.10	1.5-0/+0.10	1.10 Max
0805	1.45±0.15	2.30±0.15	8.00±0.15	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.10	4.00±0.10	1.5-0/+0.10	1.10 Max
1206	1.80±0.20	3.40±0.20	8.00±0.20	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.10	4.00±0.10	1.5-0/+0.10	1.10 Max

Plastic Tape Size Specification

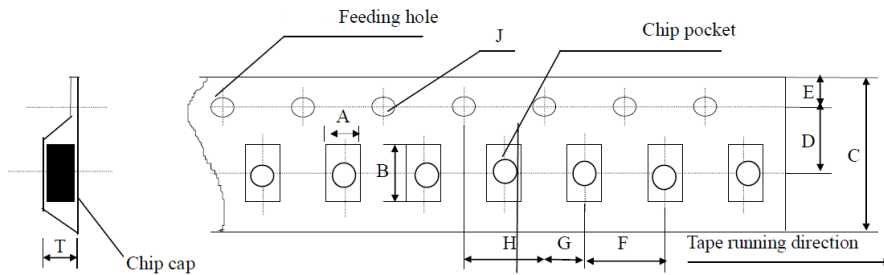

Unit: mm

Type	A	B	C	D	E	F	G	H	J	T
0805	1.55±0.20	2.35±0.20	8.00±0.20	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.10	4.00±0.10	1.50-0/+0.10	1.50 Max
1206	1.95±0.20	3.60±0.20	8.00±0.20	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.10	4.00±0.10	1.50-0/+0.10	1.85 Max
1210	2.70±0.10	3.42±0.10	8.00±0.10	3.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.55-0/+0.10	3.20 Max
1808	2.20±0.10	4.95±0.10	12.00±0.10	5.50±0.05	1.75±0.10	4.00±0.10	2.00±0.05	4.00±0.10	1.50-0/+0.10	3.00 Max
1812	3.66±0.10	4.95±0.10	12.00±0.10	5.50±0.05	1.75±0.10	8.00±0.10	2.00±0.05	4.00±0.10	1.55-0/+0.10	4.00 Max
2220	6.20±0.10	6.70±0.10	12.00±0.10	5.50±0.05	1.75±0.10	8.00±0.10	2.00±0.05	4.00±0.10	1.55-0/+0.10	2.40±0.10
2225	6.20±0.10	6.70±0.10	12.00±0.10	5.50±0.05	1.75±0.10	8.00±0.10	2.00±0.05	4.00±0.10	1.55-0/+0.10	2.40±0.10


■Recommended Soldering Method

Type	Dielectric	Capacitance	Soldering Method
01005	NPO/ X7R/X5R	/	R
0201	NPO	/	R
	X7R/X5R	/	R
0402	NPO	/	R
	X7R/X5R/X6S	/	R
0603	NPO	/	R/W
	X7R/X5R/X6S	$C \geq 1\mu F$	R
		$C < 1\mu F$	R/W
0805	NPO	/	R/W
	X7R/X5R/X6S	$C \geq 4.7\mu F$	R
		$C < 4.7\mu F$	R/W
1206	NPO	/	R/W
	X7R/X5R/X6S	$C \geq 10\mu F$	R
		$C < 10\mu F$	R/W
≥ 1210	NPO	/	R
	X7R/X5R/X6S	/	R

Soldering method : R – Reflow Soldering
W – Wave Soldering

■The temperature profile for soldering


Re-flow soldering

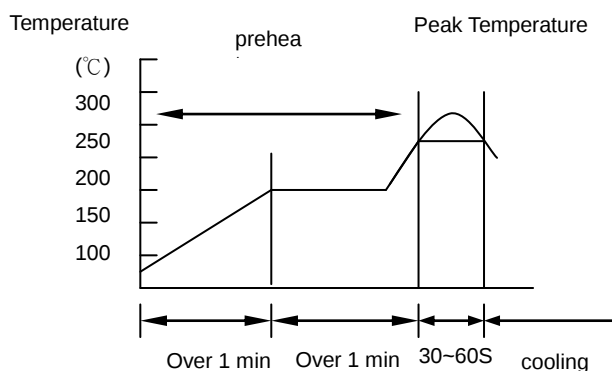

	Pb-Sn soldering	Lead-free soldering
Peak temperature	230°C ~ 250°C	240°C ~ 260°C

While in preheating, please keep the temperature difference between soldering temperature and surface temperature of chips as: $T \leq 150^\circ C$.

Wave soldering

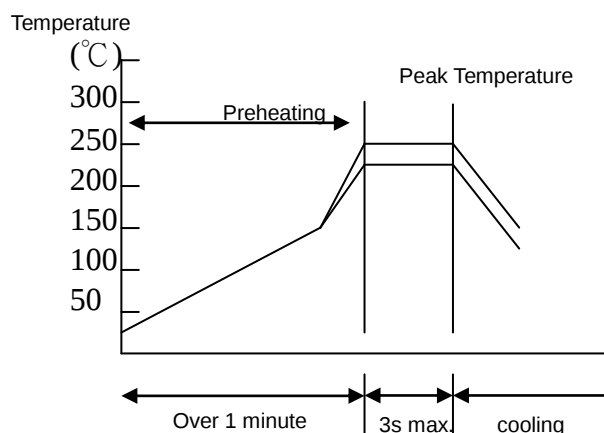

	Pb-Sn soldering	Lead-free soldering
Peak temperature	230°C ~ 260°C	240°C ~ 270°C

While in preheating, please keep the temperature difference between soldering temperature and surface temperature of chips as: $T \leq 150^\circ C$.

REVISION HISTORY

<u>REVISION</u>	<u>DATE</u>	<u>CHANGE NOTIFICATION</u>	<u>DESCRIPTION</u>
Version C	Apr 11,2025		-Add Shelf life.